



电路简图  
SCHEMATIC

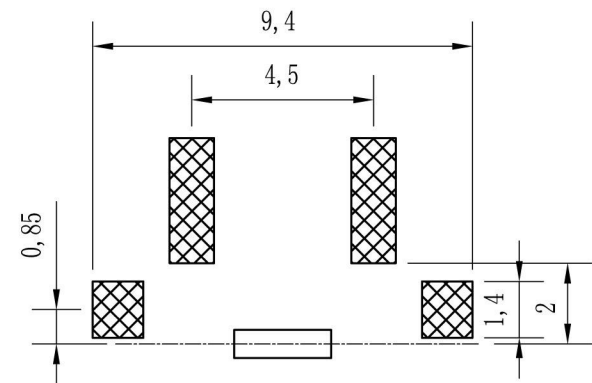

Recommended P.C.B layout

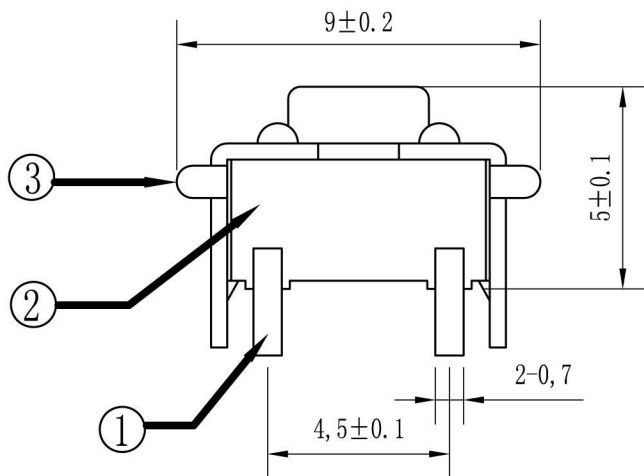

1. Rating: DC12V 50mA.
2. Travel:  $0.25 \pm 0.1$  mm.
3. Operating Force: A  $100 \pm 50$  gf  
B  $160 \pm 50$  gf  
C  $250 \pm 50$  gf
4. Contact Resistance:  $100\text{m}\Omega$  Max.
5. Life: 10,000 Cycles Min.

NO.	DESCRIPTION	MATERIAL	COLOR	REMARK
5	Reed	C5210	-----	Silver Plated
4	PUSH-button	PPA	Black	-----
3	Cover	SPCC	-----	Nickel Plated
2	Housing	PPA	Black	-----
1	Terminal	Brass	-----	Silver Plated

**TACTRONIC**

CUSTOMER COPY	TITLE:
型號 TYPE NO.	KAN0635-0501B-CH
料號 PART NO. (OLD)	
圖號 DRAWING NO.	A 狀態碼
SCALE	5:1
UNIT	mm
	A4

工程變更通知單 ECN (DCN) NO.	版次 REV	日期 DATE	說明 DESCRIPTION	改變 CHANGE	承認 APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED
	PO	01/06/04	NEW			Angle ±2° 30~ ±0.5 10~30 ±0.3 ~ 10 ±0.15
						DRAW 繪圖員 DESIGN 設計 CHECK 校閱 APPRO. 承認