


# Switch

## Tact Switch Series

### TS7716 8x8 Tact Switch Series

#### ELECTRICAL

1. Rating: 50mA 12Vdc
2. Contact Resistance : 100mΩ Max.
3. Insulation Resistance: 100MΩ Min.
4. Dielectric Strength : AC250V(50/60Hz for 1minute)
5. Electrically Life: 50, 000cycles
6. Environment temperature: -25°C~+70°C
7. Operating Force: 160~250±50gf
8. Seal temperature: 260°C~ 280°C
9. Waterproof to IEC529 seven performance standards
10. In the high humidity environment or the possibility of condensation in the context of its use, in order to prevent leakage current between terminals, be sure the switch is installed to cover the terminal to be coated

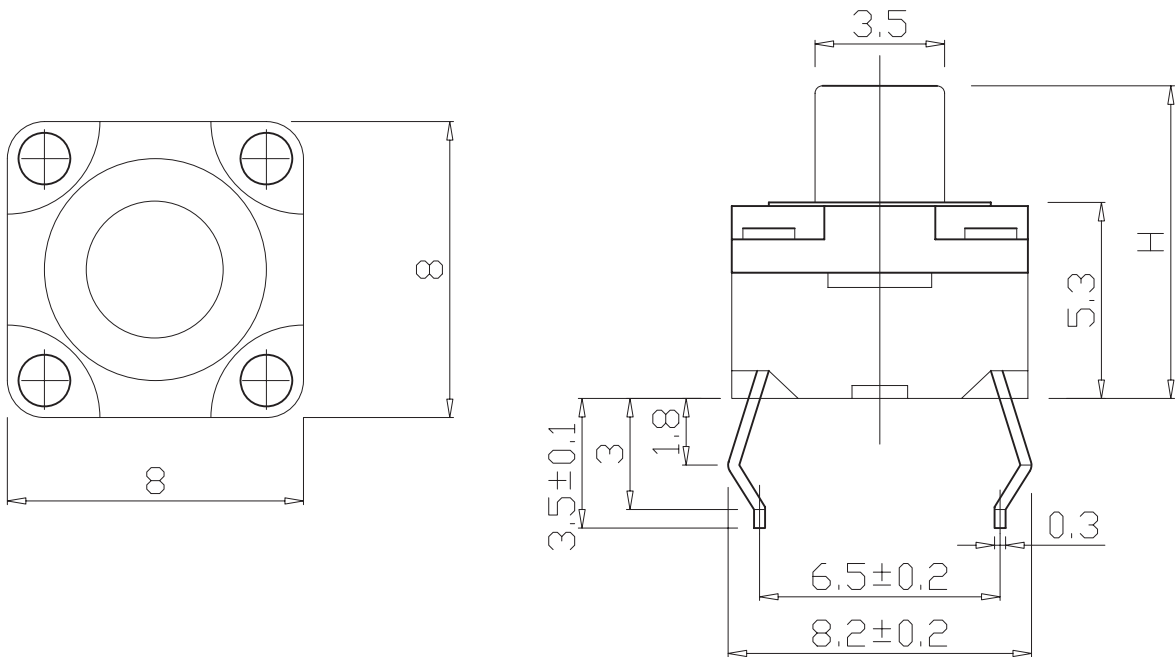

## ORDER INFORMATION

TS7716 - H1 - 160 - B

Part Number

Packing: B-Bulk  
Operating Force : 160~250gf  
High: H1=7.5mm H2=12.0mm