


P/N:WTL49U0357

Resistance Welded HC-49/U Package



FEATURE


- Height 13.46mm
- A resistance weld completely sealed type
- The tight frequency stability
- Copes with high density mounting and is the optimum for mass production

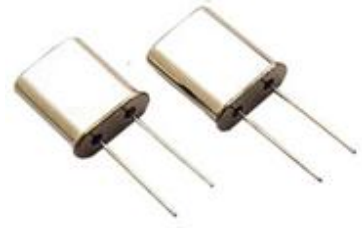

ELECTRICAL SPECIFICATIONS

Nominal frequency:	3.579545MHz
Oscillation mode:	FUNDAMENTAL
Operating temperature range	-20°C--+70°C
Storage temperature range	-40°C--+85°C
Frequency tolerance:	± 30ppm at 25±2°C
Frequency stability	± 30ppm over -20~70°C
Load capacitance:	20pF
Equivalent series resistance	90 max
Parallel capacitance(Co):	7PF Max
Drive level	100 μW Typical
Insulation resistance:	More than 500M Ω AT DC100V

Dimension

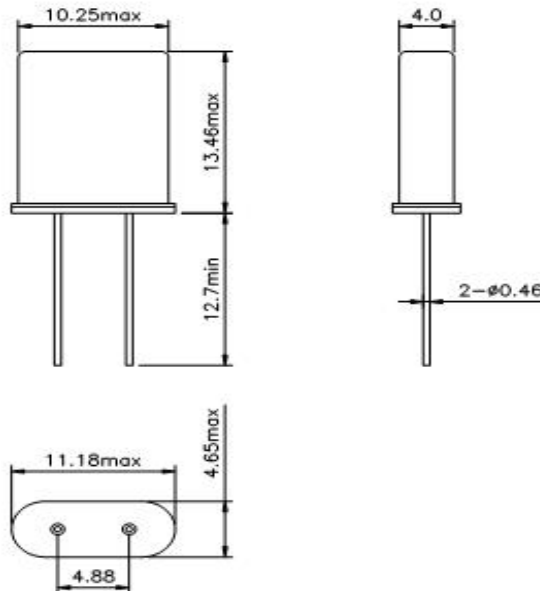

All dimensions are in mm