

Product Number: HD-AN2400-9201

Product Name: Antenna

2. Specification

Sample Photo	
	
A. Electrical Characteristics	
Frequency	2400 ~ 2500 MHz
S.W.R.	≤ 2.0
Antenna Gain	$5.0 \pm 0.7\text{dBi}$
Polarization	Linear
Impedance	50 Ohm
B. Material & Mechanical Characteristics	
Material of Radiator	CU
Material of Plastic	Body: TPE Hinge: ABS Holder: ABS
Cable Type	RG-178
Connector Type	SMA Male
Connector Pull Test	$\geq 5\text{ Kg}$
C. Environmental	
Operation Temperature	- 40 °C ~ + 65 °C
Storage Temperature	- 40 °C ~ + 80 °C
Antenna Color Storage life	< 2 year

Product Number: HD-AN2400-9201

Product Name: Antenna


3. Characteristics and Reliability Test

Test Items		Test Condition and Procedure	Requirements
C1	S.W.R.	Set DUT on Network Analyzer; make individual calibration to test	Directive DUT specification
C2	Antenna Gain	Set DUT on Antenna Chamber; make individual calibration to test	Directive DUT specification
M1	Vibration	GB / T2423 . 48-1997 Amplitude: 0.03 inch (1.5mm); Freq: 20 to 80 to 20 Hz 3 directions; 2 hours for each direction	1. No Visual Damage 2. Frequency Tol.<= 5%
M2	Random Drop	GB / T2423.8-1995 Height: 1.0 Meter; 3 directions; 1 time for each direction	1. No parts separated 2. Frequency Tol.<= 5%
M3	Solderability	GB 2423 . 28- 82 Solder iron: 260±5°C; Duration: 5 seconds	1. Mounted on PCB 2. No Visual Damage
M4	Terminal-Pull Test	Holding with individual specification; force applied to axis of terminal	1. Directive DUT specification 2. Frequency Tol.<= 5%
M5	Terminal-Torque Test	Holding with individual specification; applied clockwise and counterclockwise to the axis of terminal	1. Directive DUT specification 2. Frequency Tol.<= 5%
M6	Dimension	Inspection of dimension, color, material, package, surface process	Directive DUT specification
E1	Salt Spray	GB / T 2423 . 17- 93 Temp: 35°C; RH: >= 95%; NaCl solution: >= 5%; Time: 24 hours	After 2 Hours Recovery 1. No Visual Damage 2. Frequency Tol.<= 5%
E2	Humidity	GB / T 2423 . 4 - 93 Temp: 80°C / 12 H; -40°C / 12H RH: >= 90%; Time: 24 hours	After 2 Hours Recovery 1. No Visual Damage 2. Frequency Tol.<= 5%
E3	Thermal Shock	GB / T 2423 . 22 - 87 1 Cycle: - 40°C (30 minutes) to + 80°C (30 minutes) Cycles: 24	After 2 Hours Recovery 1. No Visual Damage 2. Frequency Tol.<= 5%
E4	Life (High Temp.)	GB /T 2423 . 2 - 89 Temp: 80°C; Time: 24 hours	After 2 Hours Recovery 1. No Visual Damage 2. Frequency Tol.<= 5%
R1	RoHS	With Reference to IEC 62321:2008 with flow chart	Directive RoHS 2011/65/EU
R2	PFOS	With Reference to USA EPA 3540C:1996 by LC/MS	Directive RoHS 2006/122/EC
R3	PFOA	With Reference to USA EPA 3540C:1996 by LC/MS	Directive RoHS 2006/122/EC

Product Number: HD-AN2400-9201

Product Name: Antenna

4. Antenna - S Parameter Test Data

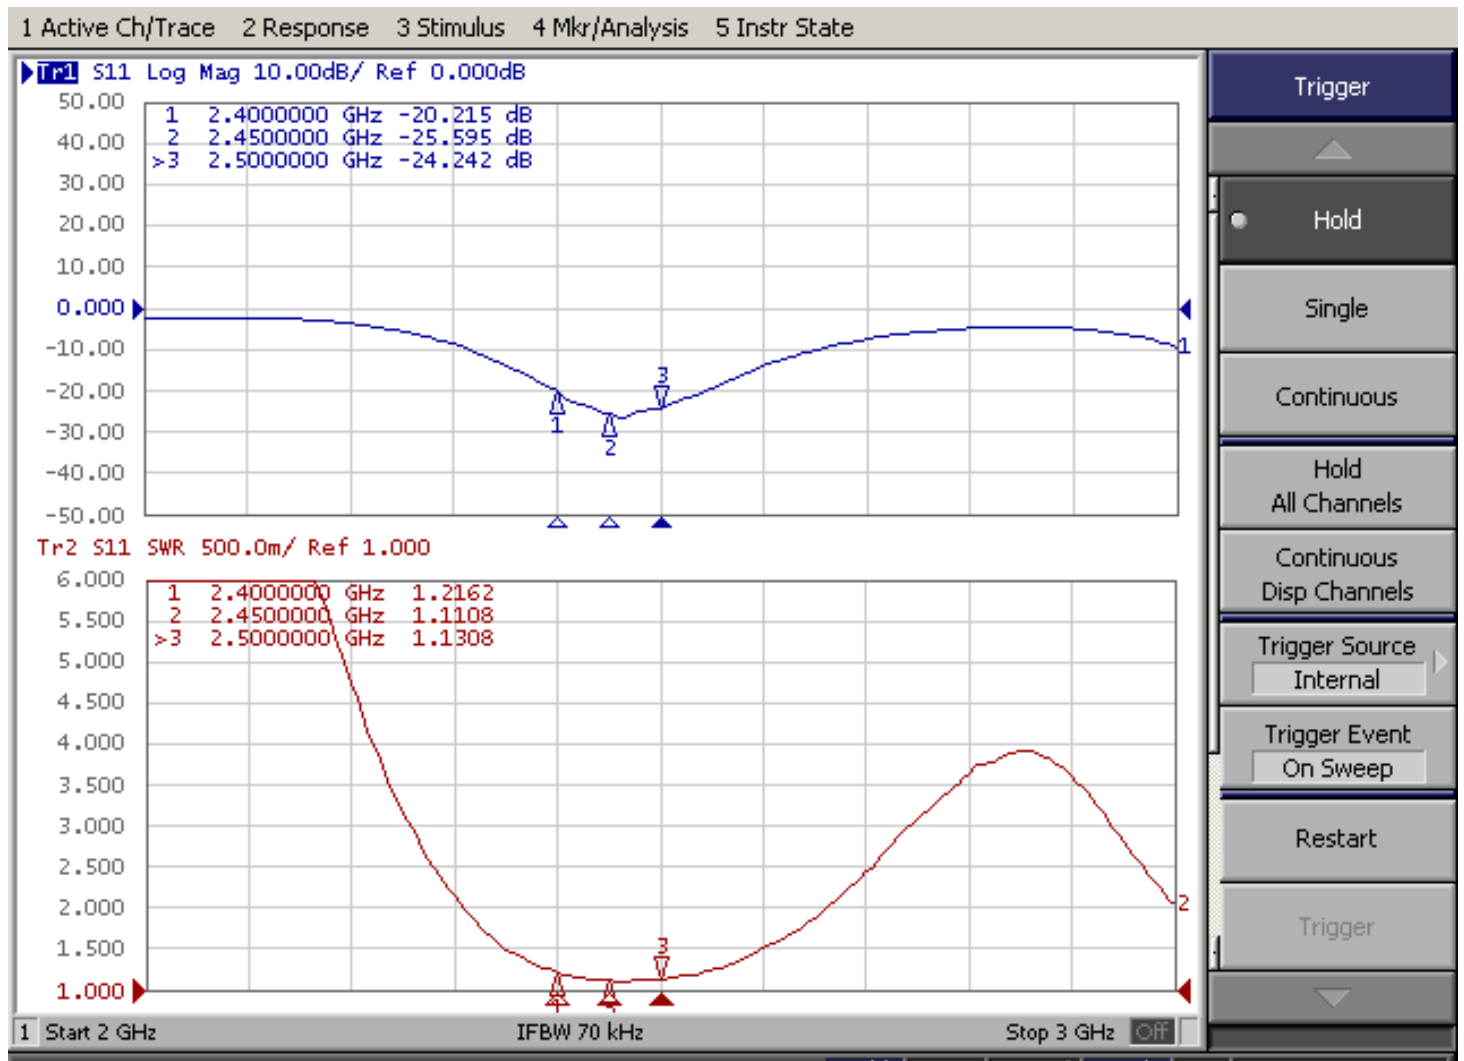

Product Number: HD-AN2400-9201

Product Name: Antenna

5. Antenna - Radiation Pattern Test Data

Testing Equipment Specification:

Antenna Anechoic Chamber Dimension: 8 x 4 x 4 m


Quiet Zone: 600mm @1 GHz

Isolation: >100dB @ 1 MHz ~ 10 GHz

Testing Equipment: Agilent 5071B

Received Antenna: 0.7 ~ 6.0 GHz for Gain Calibration

Double Ridged Horn Antenna

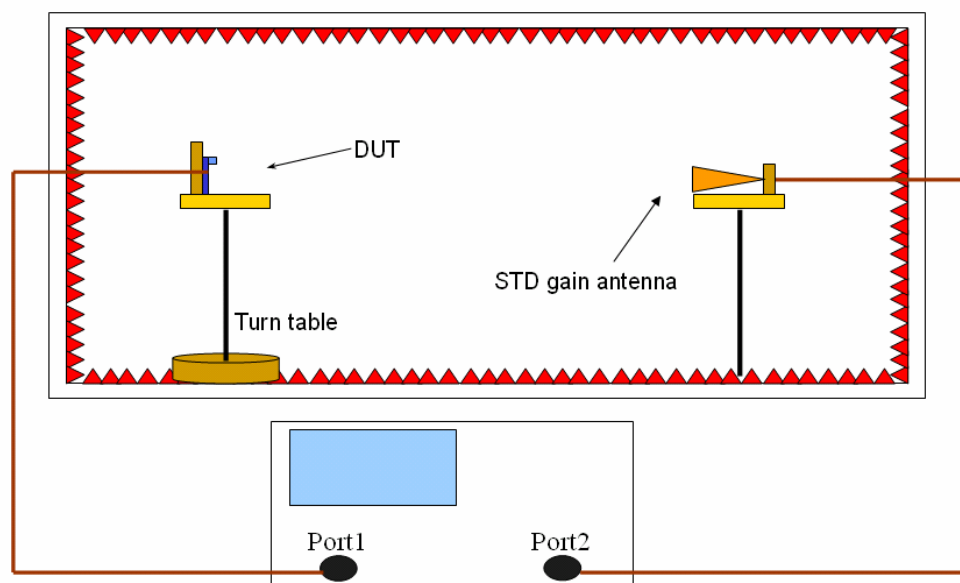


6. Mechanical Drawing


See attached files

7. Material Description and RoHS Test Report


See attached files

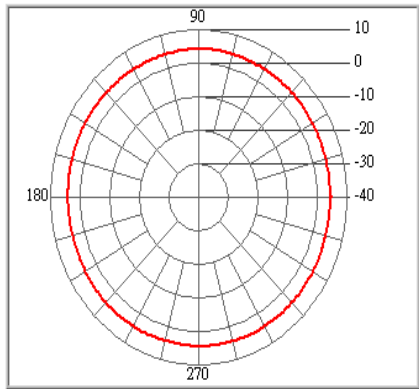


2390

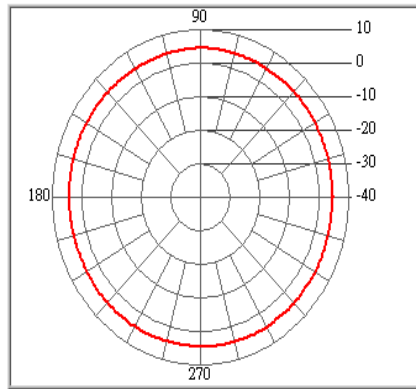


2400

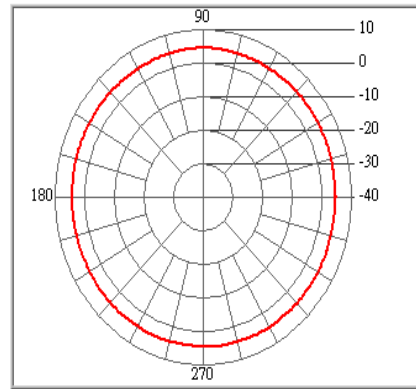


2410

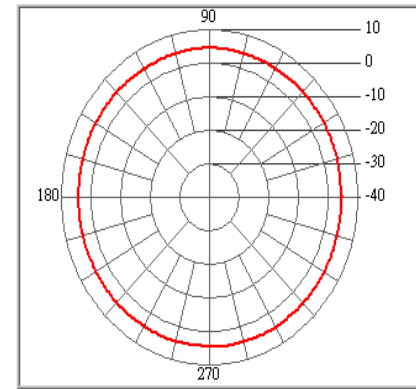


2420

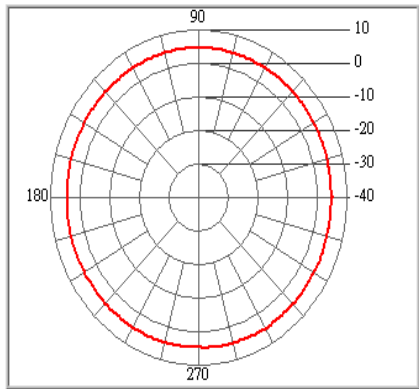


2430

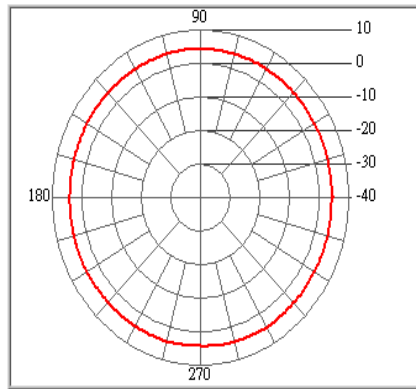


2440

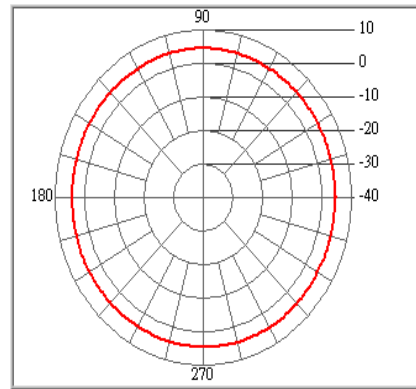


2450

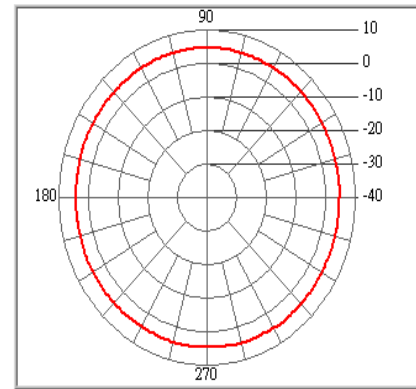


2460

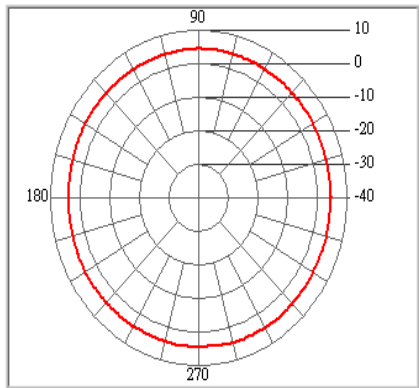


2470

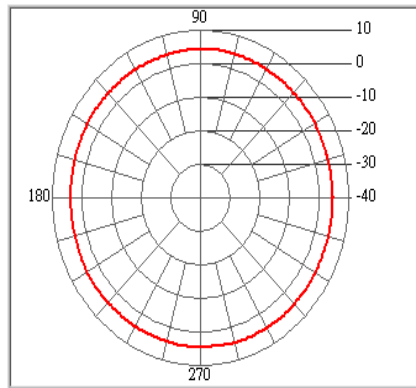

2480

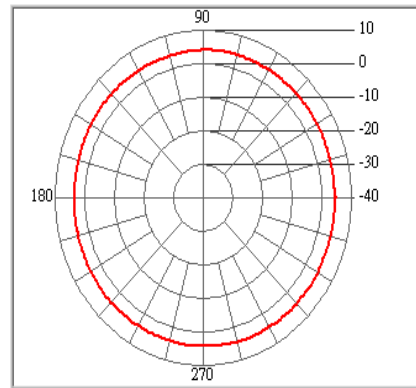

2490



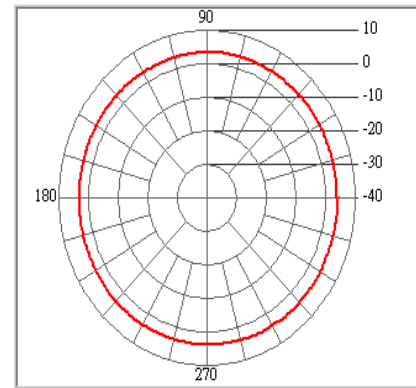


2500

RoHS

Compatible

SIGN	DATE	DESCRIPTION	APPROVER
△			
△			
△			

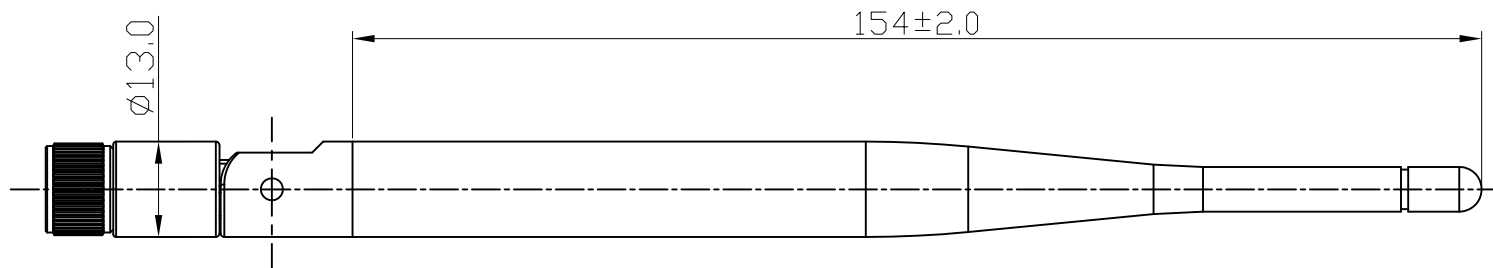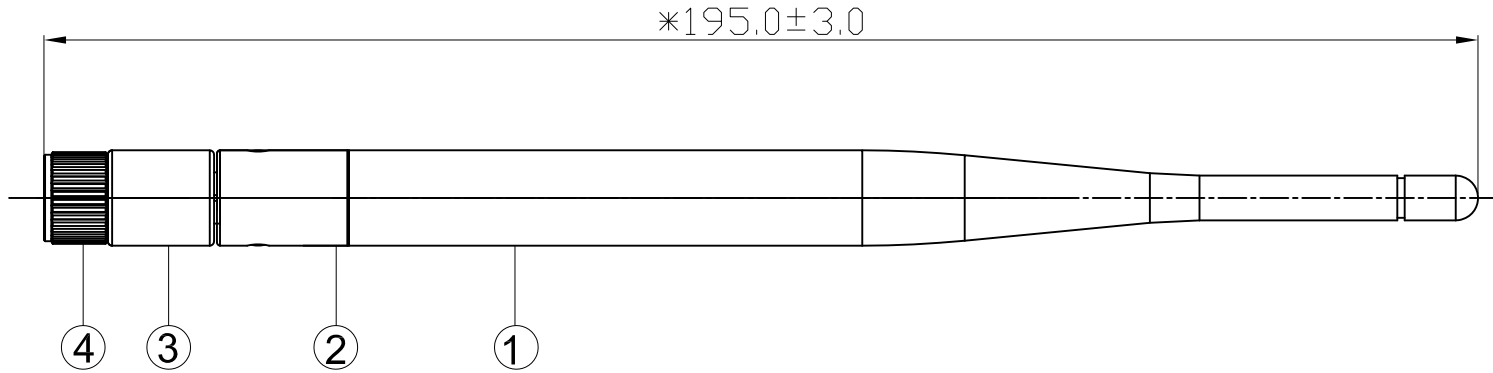

4	SMA320-CGR5AN03	SMA Male Reverse		Black	1
3	AN03-T07B	Body1	ABS	Black	1
2	AN9201-07B	Body2	ABS	Black	1
1	AN9201-04B	Body	TPE	Black	1
No.	Part Number	Description	Material	Finished	Q'ty

TITLE: 2.4 GHz 5dBi Antenna				
PART NO.: HD-AN2400-9201			DWG NAME:	
APPROVED BY	CHECKED BY	DESIGNED BY		Tolerance
LQ		DJC	UNITS: mm	X.X ±0.3
2018.04.02		2018.04.02	SCALE: 1/1	X.XX ±0.1
			REVISION: A	X° ±1°




PACKING CRITERION

Date: 2018/04/02

Page: 1 of 1


Part Number : HD-AN2400-9201	Revision : A
Name: 2.4 GHz 5dBi Antenna	Customer : ALL

1.

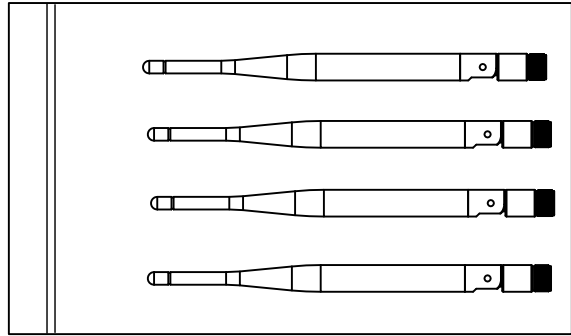


R-PE-BAG-300245006 50PCS/BAG

2.

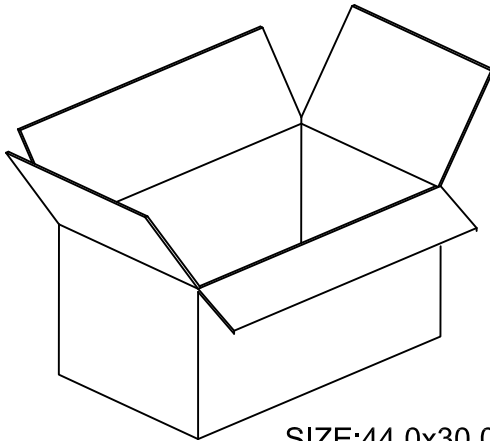

SIZE:44.0x30.0x28.0cm
1000 PCS/BOX

3.

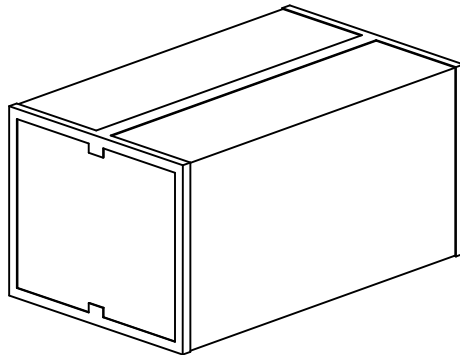

APPROVED BY : LQ

CHECKED BY :

DESIGNED BY : DJC