

IR2103(S) & (PbF)

HALF-BRIDGE DRIVER

Features

- Floating channel designed for bootstrap operation
- Fully operational to +600V
- Tolerant to negative transient voltage
- dV/dt immune
- Gate drive supply range from 10 to 20V
- Undervoltage lockout
- 3.3V, 5V and 15V logic compatible
- Cross-conduction prevention logic
- Matched propagation delay for both channels
- Internal set deadtime
- High side output in phase with HIN input
- Low side output out of phase with LIN input
- Also available LEAD-FREE


Description

The IR2103(S) are high voltage, high speed power MOSFET and IGBT drivers with dependent high and low side referenced output channels. Proprietary HVIC and latch immune CMOS technologies enable ruggedized monolithic construction. The logic input is compatible with standard CMOS or LSTTL output, down to 3.3V logic. The output drivers feature a high pulse current buffer stage designed for minimum driver cross-conduction. The floating channel can be used to drive an N-channel power MOSFET or IGBT in the high side configuration which operates up to 600 volts.


Product Summary

V _{OFFSET}	600V max.
I _O +/-	130 mA / 270 mA
V _{OUT}	10 - 20V
t _{on/off} (typ.)	680 & 150 ns
Deadtime (typ.)	520 ns

Packages

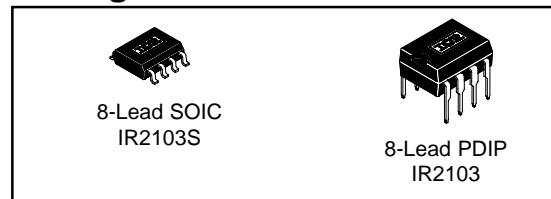

Typical Connection

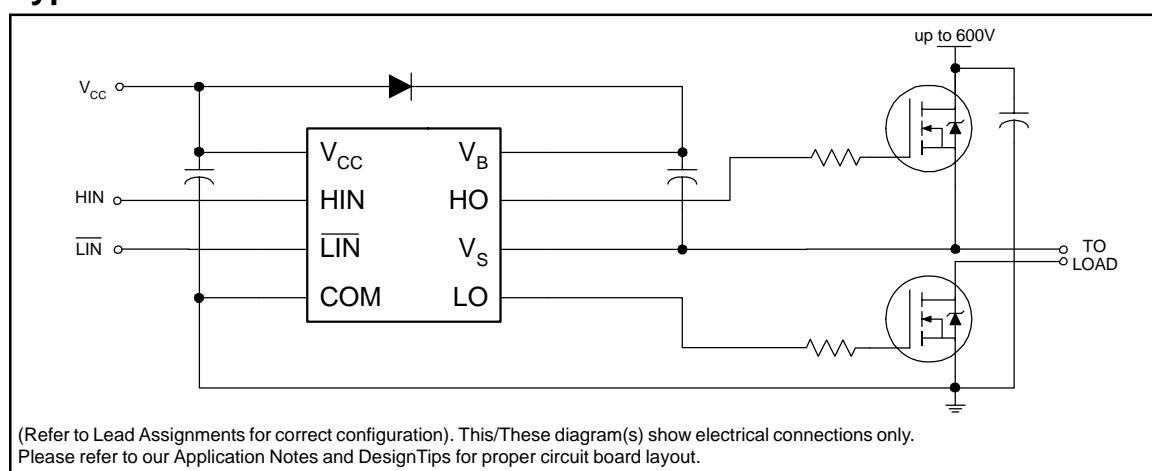

IR2103(S)&(PbF)

International
I²R Rectifier

Absolute Maximum Ratings

Absolute maximum ratings indicate sustained limits beyond which damage to the device may occur. All voltage parameters are absolute voltages referenced to COM. The thermal resistance and power dissipation ratings are measured under board mounted and still air conditions.

Symbol	Definition		Min.	Max.	Units
V_B	High side floating absolute voltage	V	-0.3	625	V
V_S	High side floating supply offset voltage		$V_B - 25$	$V_B + 0.3$	
V_{HO}	High side floating output voltage		$V_S - 0.3$	$V_B + 0.3$	
V_{CC}	Low side and logic fixed supply voltage		-0.3	25	
V_{LO}	Low side output voltage		-0.3	$V_{CC} + 0.3$	
V_{IN}	Logic input voltage (H_{IN} & \bar{L}_{IN})		-0.3	$V_{CC} + 0.3$	
dV_S/dt	Allowable offset supply voltage transient		—	50	V/ns
P_D	Package power dissipation @ $T_A \leq +25^\circ\text{C}$	(8 Lead PDIP)	—	1.0	W
		(8 Lead SOIC)	—	0.625	
R_{thJA}	Thermal resistance, junction to ambient	(8 Lead PDIP)	—	125	°C/W
		(8 Lead SOIC)	—	200	
T_J	Junction temperature		—	150	°C
T_S	Storage temperature		-55	150	
T_L	Lead temperature (soldering, 10 seconds)		—	300	

Recommended Operating Conditions

The input/output logic timing diagram is shown in figure 1. For proper operation the device should be used within the recommended conditions. The V_S offset rating is tested with all supplies biased at 15V differential.

Symbol	Definition		Min.	Max.	Units
V_B	High side floating supply absolute voltage	V	$V_S + 10$	$V_S + 20$	V
V_S	High side floating supply offset voltage		Note 1	600	
V_{HO}	High side floating output voltage		V_S	V_B	
V_{CC}	Low side and logic fixed supply voltage		10	20	
V_{LO}	Low side output voltage		0	V_{CC}	
V_{IN}	Logic input voltage (H_{IN} & \bar{L}_{IN})		0	V_{CC}	
T_A	Ambient temperature		-40	125	°C

Note 1: Logic operational for V_S of -5 to +600V. Logic state held for V_S of -5V to $-V_{BS}$. (Please refer to the Design Tip DT97-3 for more details).

Dynamic Electrical Characteristics

V_{BIAS} (V_{CC} , V_{BS}) = 15V, C_L = 1000 pF and T_A = 25°C unless otherwise specified.

Symbol	Definition	Min.	Typ.	Max.	Units	Test Conditions
t_{on}	Turn-on propagation delay	—	680	820	ns	$V_S = 0V$
t_{off}	Turn-off propagation delay	—	150	220		$V_S = 600V$
t_r	Turn-on rise time	—	100	170		
t_f	Turn-off fall time	—	50	90		
DT	Deadtime, LS turn-off to HS turn-on & HS turn-on to LS turn-off	400	520	650		
MT	Delay matching, HS & LS turn-on/off	—	—	60		

Static Electrical Characteristics


V_{BIAS} (V_{CC} , V_{BS}) = 15V and T_A = 25°C unless otherwise specified. The V_{IN} , V_{TH} and I_{IN} parameters are referenced to COM. The V_O and I_O parameters are referenced to COM and are applicable to the respective output leads: HO or LO.

Symbol	Definition	Min.	Typ.	Max.	Units	Test Conditions
V_{IH}	Logic "1" (HIN) & Logic "0" ($\bar{L}\bar{I}N$) input voltage	3	—	—	V	$V_{CC} = 10V$ to 20V
V_{IL}	Logic "0" (HIN) & Logic "1" (LIN) input voltage	—	—	0.8		$V_{CC} = 10V$ to 20V
V_{OH}	High level output voltage, V_{BIAS} - V_O	—	—	100	mV	$I_O = 0A$
V_{OL}	Low level output voltage, V_O	—	—	100		$I_O = 0A$
I_{LK}	Offset supply leakage current	—	—	50	μA	$V_B = V_S = 600V$
I_{QBS}	Quiescent V_{BS} supply current	—	30	55		$V_{IN} = 0V$ or 5V
I_{QCC}	Quiescent V_{CC} supply current	—	150	270		$V_{IN} = 0V$ or 5V
I_{IN+}	Logic "1" input bias current	—	3	10		$HIN = 5V$, $\bar{L}\bar{I}N = 0V$
I_{IN-}	Logic "0" input bias current	—	—	1		$HIN = 0V$, $\bar{L}\bar{I}N = 5V$
V_{CCUV+}	V_{CC} supply undervoltage positive going threshold	8	8.9	9.8	V	
V_{CCUV-}	V_{CC} supply undervoltage negative going threshold	7.4	8.2	9		
I_{O+}	Output high short circuit pulsed current	130	210	—	mA	$V_O = 0V$, $V_{IN} = V_{IH}$ $PW \leq 10 \mu s$
I_{O-}	Output low short circuit pulsed current	270	360	—		$V_O = 15V$, $V_{IN} = V_{IL}$ $PW \leq 10 \mu s$

IR2103(S)&(PbF)

International
IR Rectifier

Functional Block Diagram

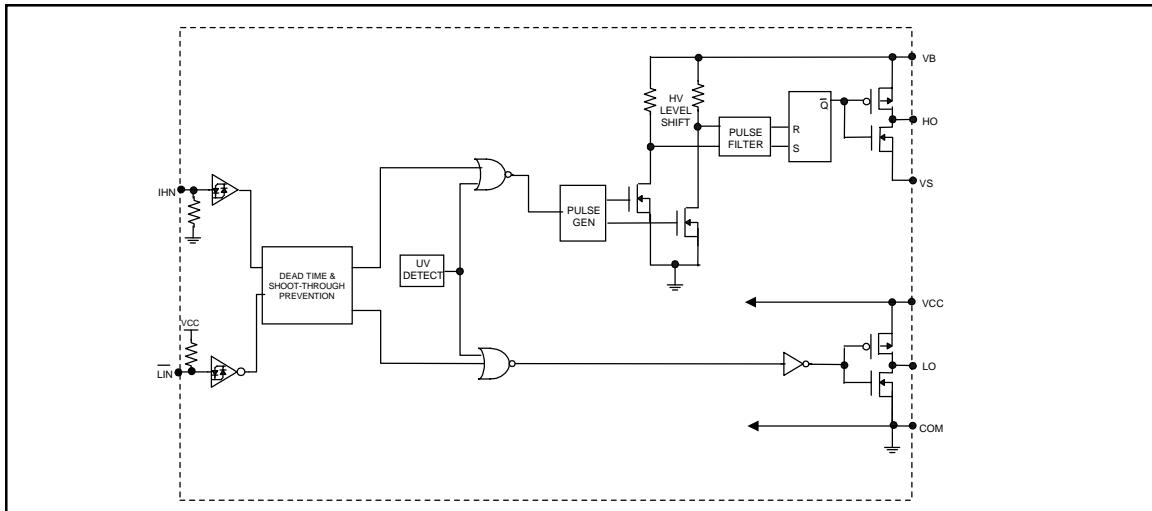

Lead Definitions

Symbol	Description
HIN	Logic input for high side gate driver output (HO), in phase
LIN	Logic input for low side gate driver output (LO), out of phase
V _B	High side floating supply
HO	High side gate drive output
V _S	High side floating supply return
V _{CC}	Low side and logic fixed supply
LO	Low side gate drive output
COM	Low side return

Lead Assignments

 8 Lead PDIP	 8 Lead SOIC
IR2103	IR2103S

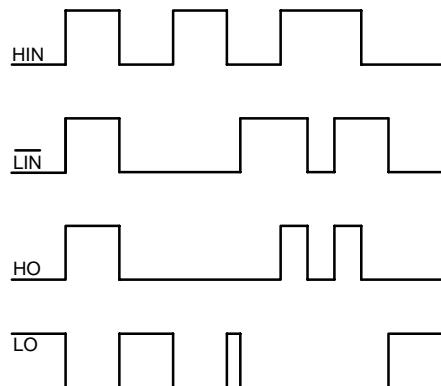


Figure 1. Input/Output Timing Diagram

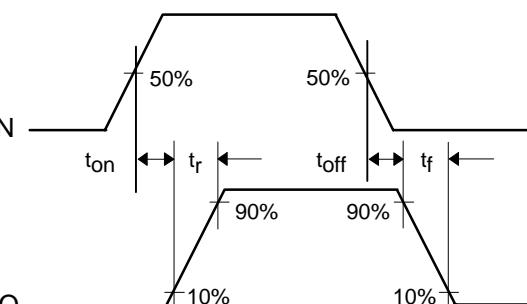
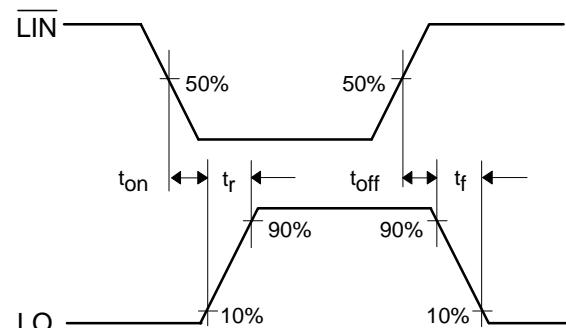


Figure 2. Switching Time Waveform Definitions

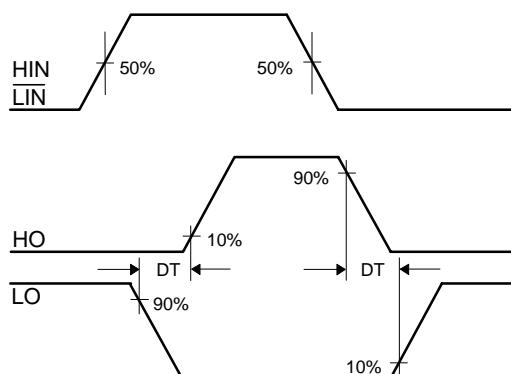


Figure 4. Deadtime Waveform Definitions

IR2103(S)&(PbF)

International
I²R Rectifier

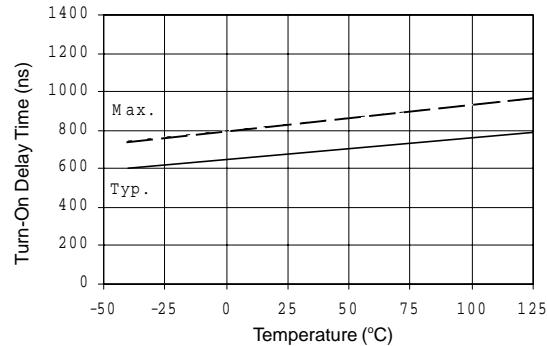


Figure 6A. Turn-On Time vs Temperature

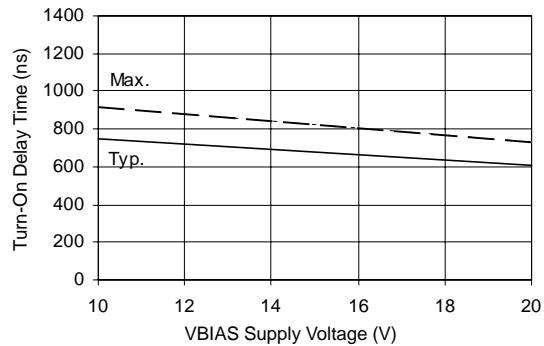


Figure 6B. Turn-On Time vs Supply Voltage

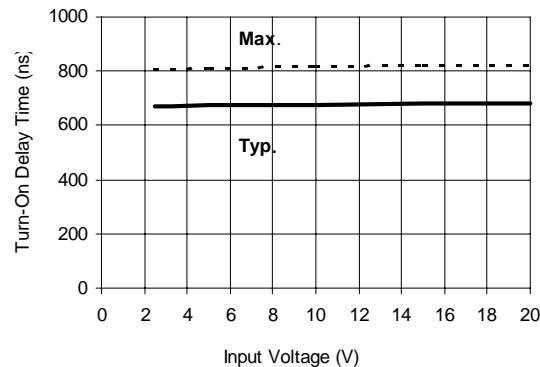


Figure 6C. Turn-On Time vs Input Voltage

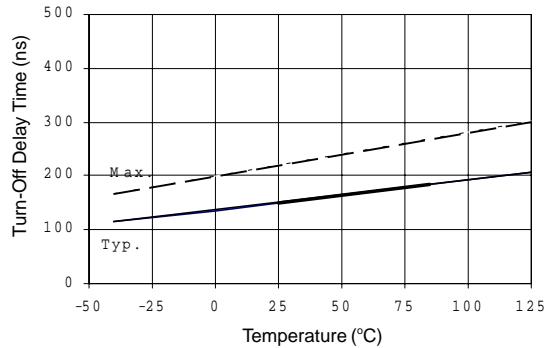


Figure 7A. Turn-Off Time vs Temperature

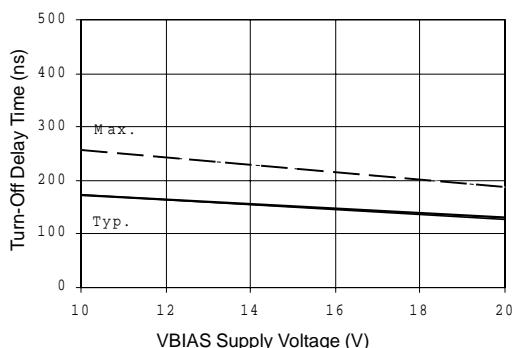


Figure 7B. Turn-Off Time vs Supply Voltage

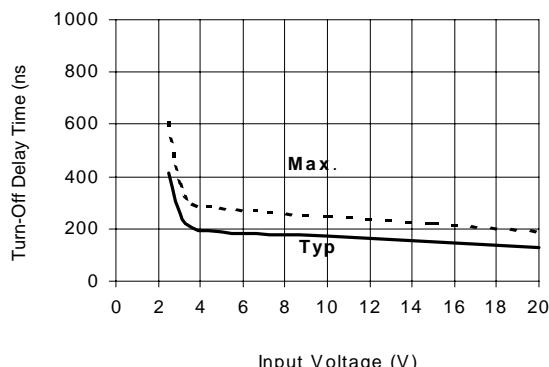


Figure 7C. Turn-Off Time vs Input Voltage

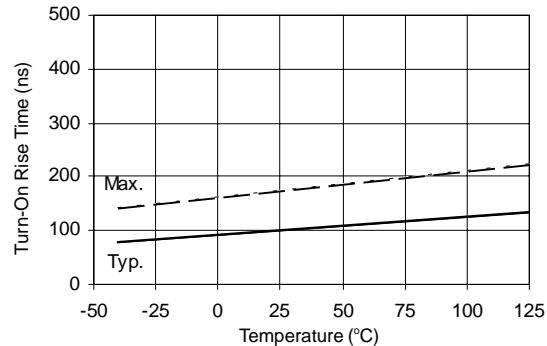


Figure 9A. Turn-On Rise Time vs Temperature

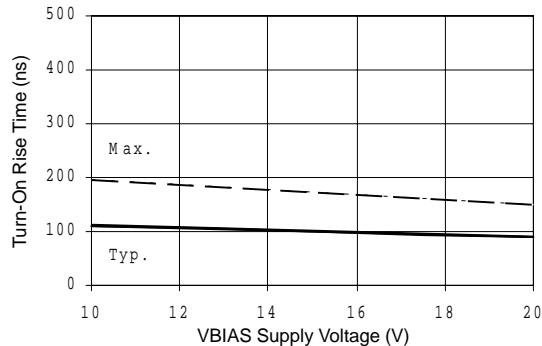


Figure 9B. Turn-On Rise Time vs Voltage

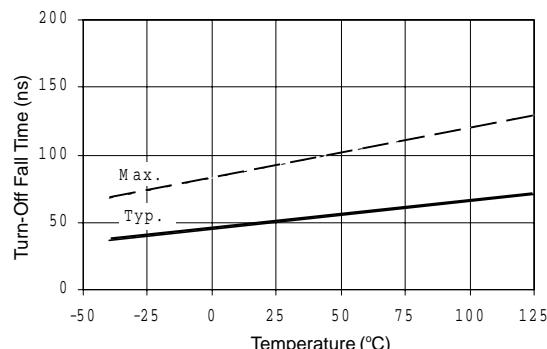


Figure 10A. Turn Off Fall Time vs Temperature

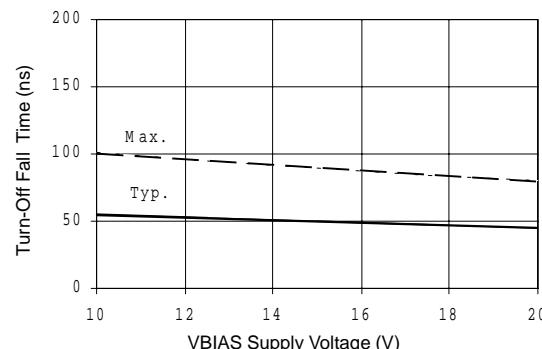


Figure 10B. Turn Off Fall Time vs Voltage

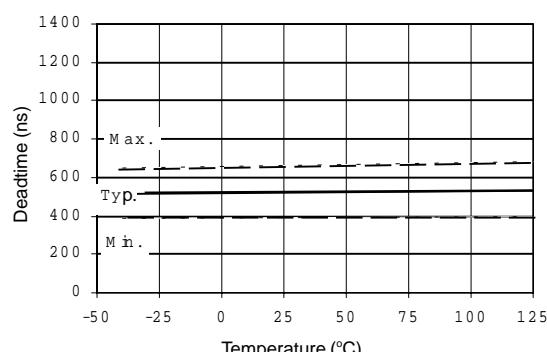


Figure 11A. Deadtime vs Temperature

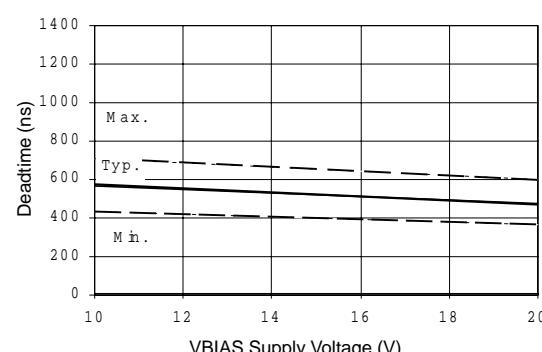


Figure 11B. Deadtime vs Voltage

IR2103(S)&(PbF)

International
I²R Rectifier

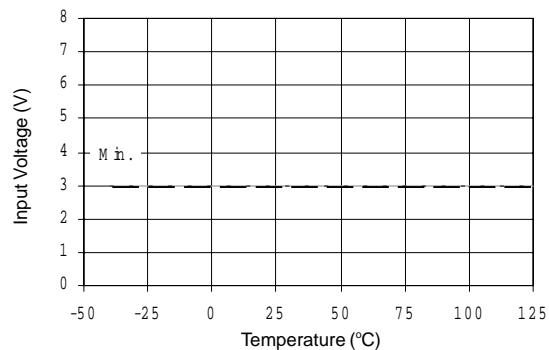


Figure 12A. Logic "1" ($\overline{\text{HIN}}$) & Logic "0" ($\overline{\text{LIN}}$) Input Voltage vs Temperature

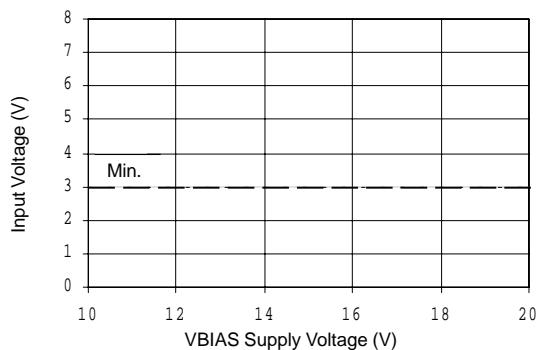


Figure 12B. Logic "1" ($\overline{\text{HIN}}$) & Logic "0" ($\overline{\text{LIN}}$) Input Voltage vs Voltage

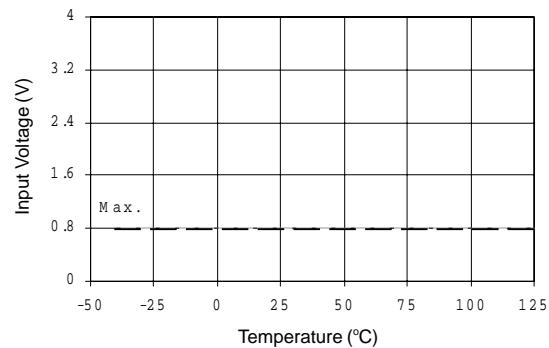


Figure 13A. Logic "0"($\overline{\text{HIN}}$) & Logic "1"($\overline{\text{LIN}}$) Input Voltage vs Temperature

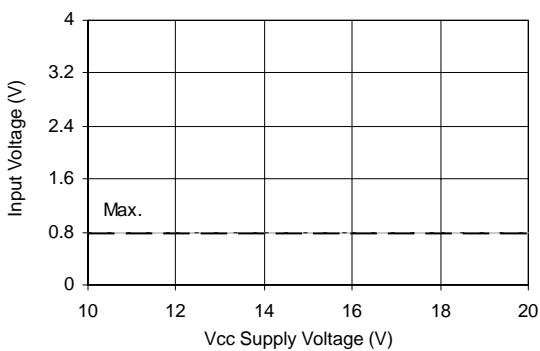


Figure 13B. Logic "0"($\overline{\text{HIN}}$) & Logic "1"($\overline{\text{LIN}}$) Input Voltage vs Voltage

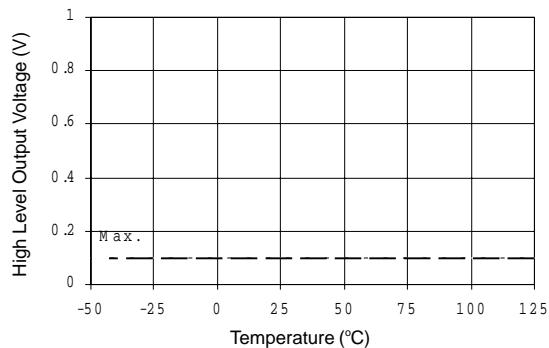


Figure 14A. High Level Output vs Temperature

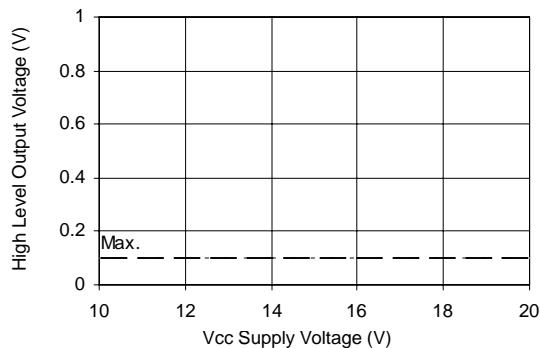


Figure 14B. High Level Output vs Voltage

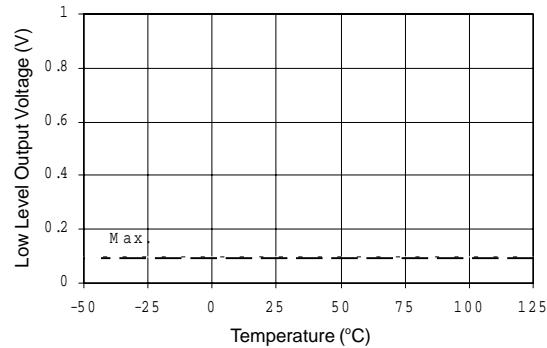


Figure 15A. Low Level Output vs Temperature

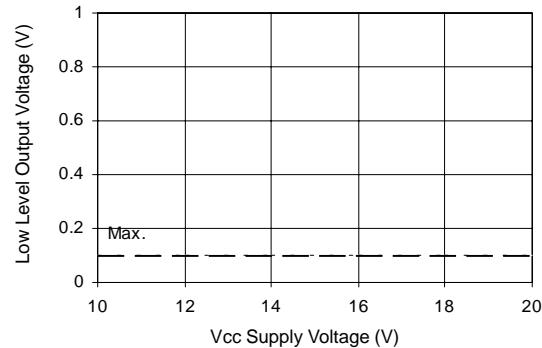


Figure 15B. Low Level Output vs Voltage

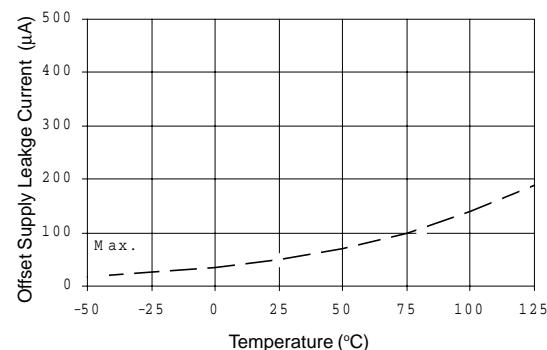


Figure 16A. Offset Supply Current vs Temperature

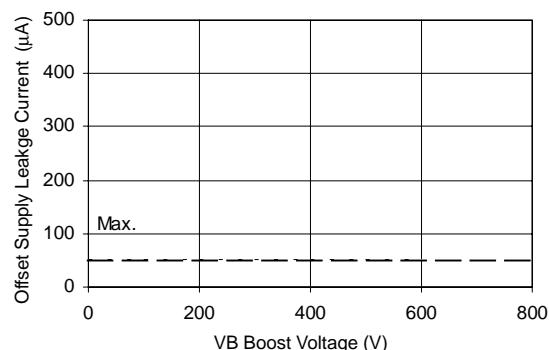


Figure 16B. Offset Supply Current vs Voltage

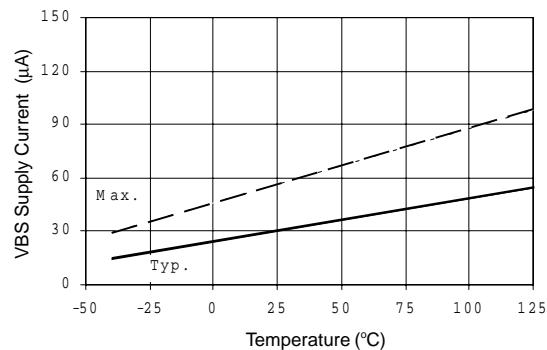


Figure 17A. VBS Supply Current vs Temperature

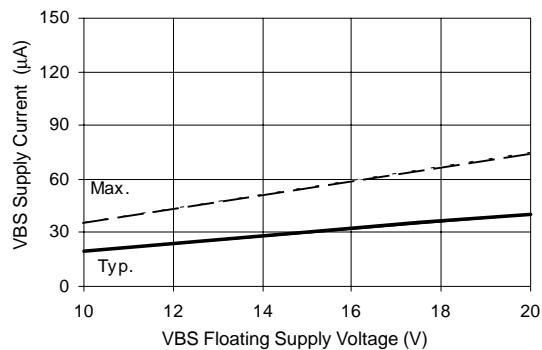


Figure 17B. VBS Supply Current vs Voltage

IR2103(S)&(PbF)

International
I^{OR} Rectifier

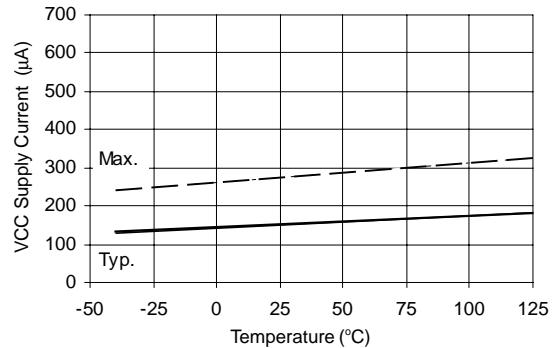


Figure 18A. Vcc Supply Current vs Temperature

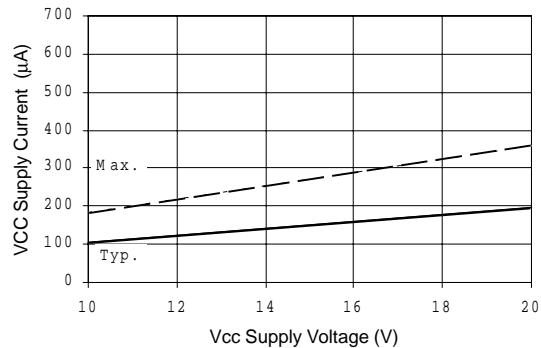


Figure 18B. Vcc Supply Current vs Voltage

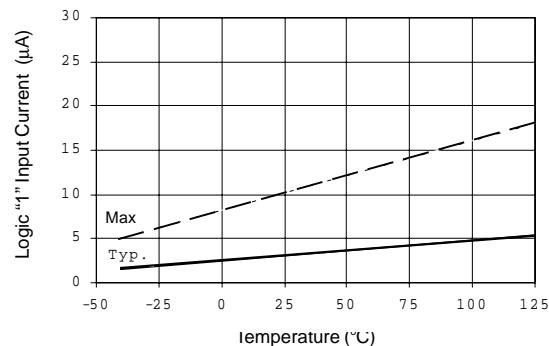


Figure 19A. Logic "1" Input Current vs Temperature

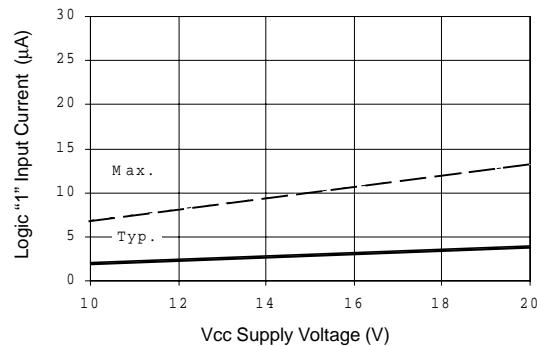


Figure 19B. Logic "1" Input Current vs Voltage

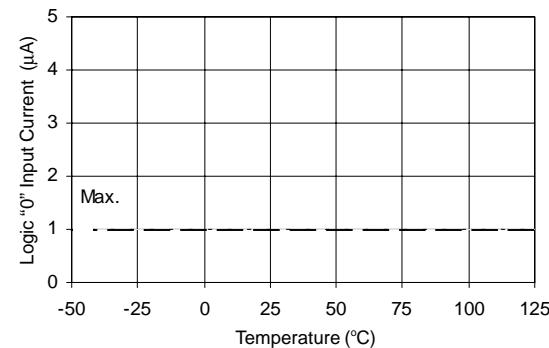


Figure 20A. Logic "0" Input Current vs Temperature

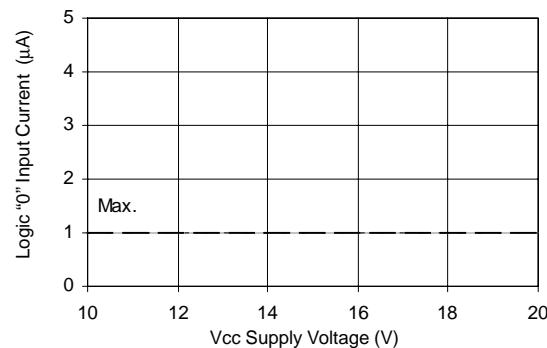


Figure 20B. Logic "0" Input Current vs Voltage

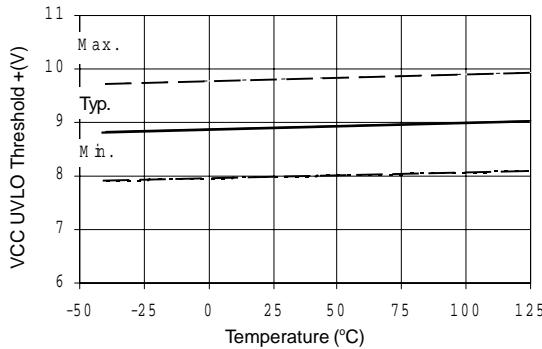


Figure 21A. Vcc Undervoltage Threshold(+) vs Temperature

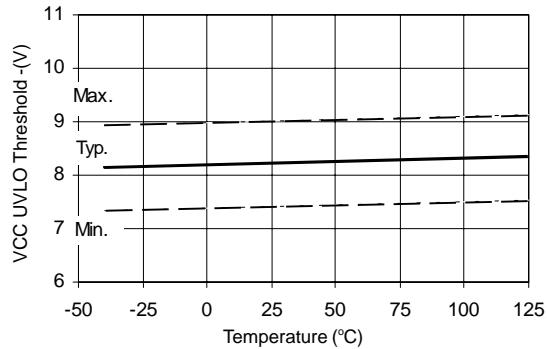


Figure 21B. Vcc UndervoltageThreshold (-) vs Temperature

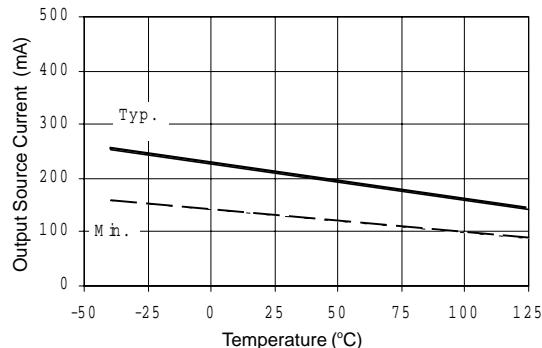


Figure 22A. Output Source Current vs Temperature

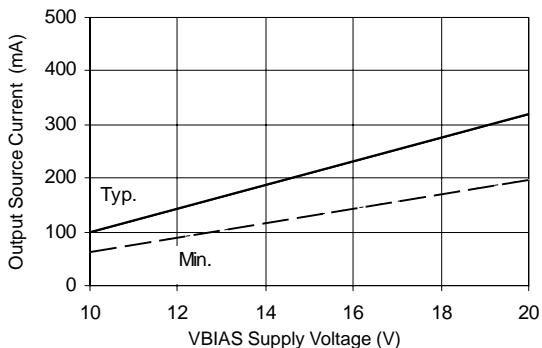


Figure 22B. Output Source Current vs Voltage

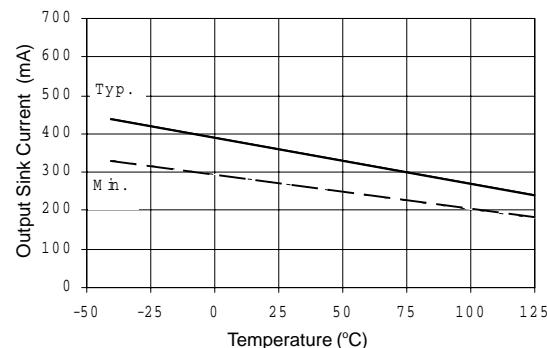


Figure 23A. Output Sink Current vs Temperature



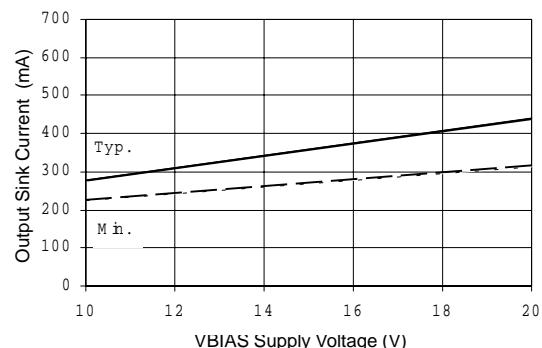


Figure 23B. Output Sink Current vs Voltage


IR2103(S)&(PbF)

International
IR Rectifier

Case outlines

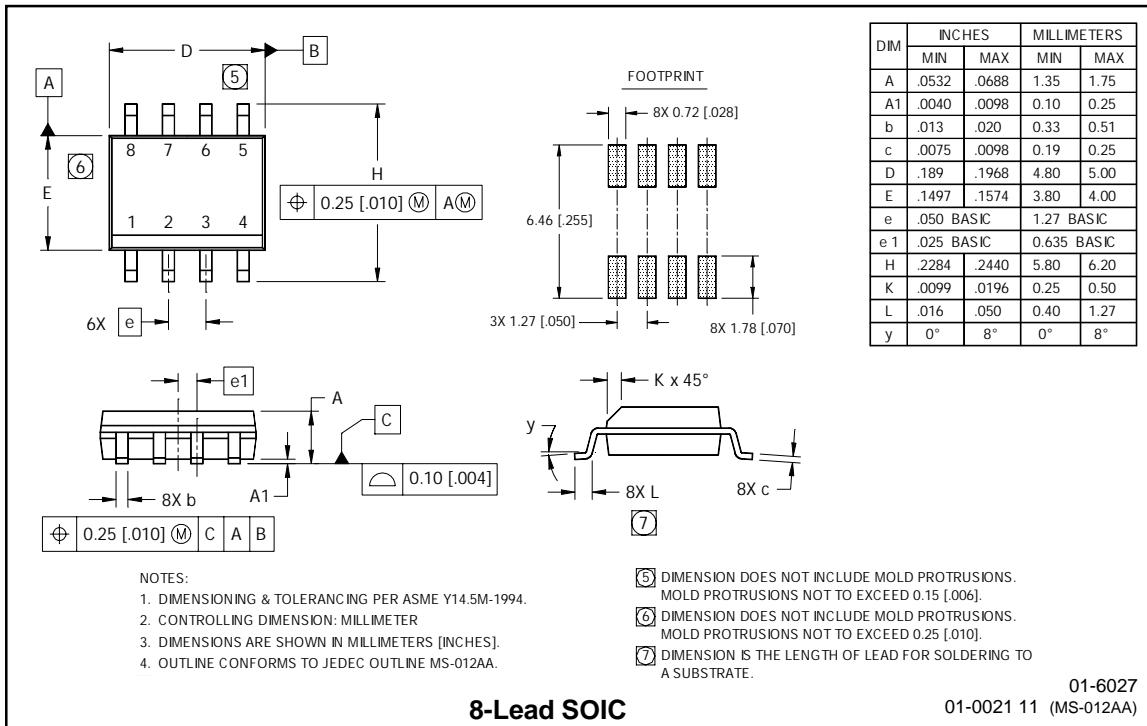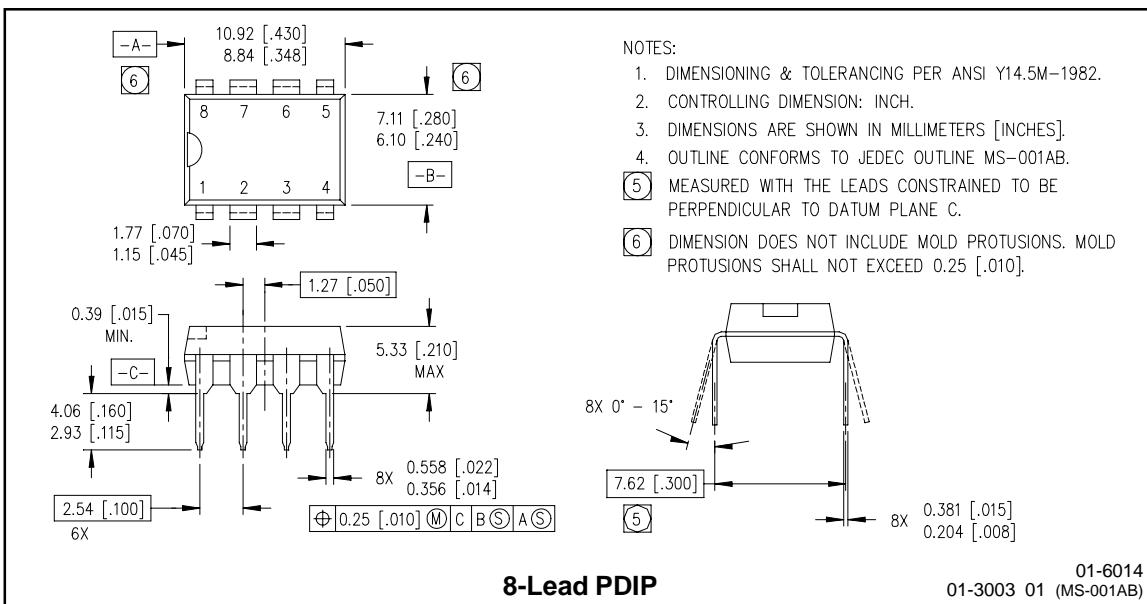

LEADFREE PART MARKING INFORMATION

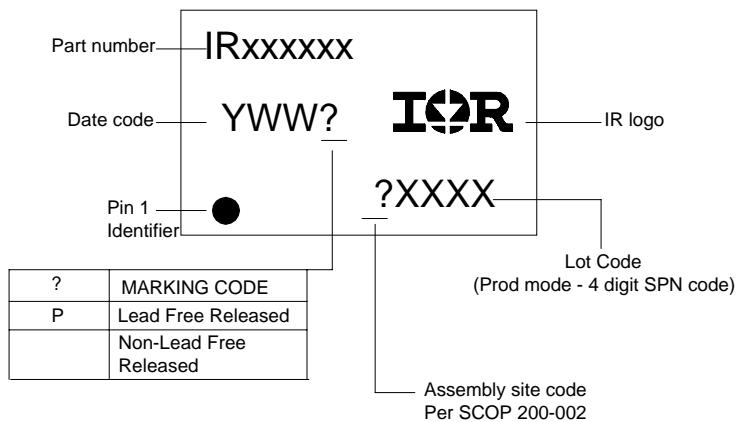

ORDER INFORMATION

Basic Part (Non-Lead Free)

8-Lead PDIP IR2103 order IR2103
8-Lead SOIC IR2103S order IR2103S

Leadfree Part

8-Lead PDIP IR2103 order IR2103PbF
8-Lead SOIC IR2103S order IR2103SPbF

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245 Tel: (310) 252-7105
This product has been qualified per industrial level
Data and specifications subject to change without notice. 4/2/2004