
BN 3319
Elementy dystansowe sześciokątne

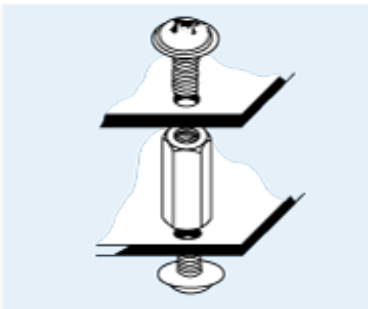
z gwintem wewnętrznym po obu stronach

Stal

powłoka cynkowa pasywacja biała



Broszura techniczna dostępna na życzenie


 jeśli $b=L$ z pełnym gwintem

Article#	d_1	s h11	b min.	L
3664355	M2,5	5	5	5
3664356			6	6
3664357			8	8
3664358			10	10
3664360			12	12
3664362			16	16
1384929	M3	5,5	5	5
1384937			6	6
1384945			8	8
1384953			10	10
1384961			12	12
1384988			14	14
1384996			16	16
1385003			18	18
1385011			7	20
1385038				25
1385046				30
1385054				35
1385062				40
1385070				45
1385089				50

jeśli b=L z pełnym gwintem

Article#	d ₁	s h11	b min.	L
1385097	M3	5,5	7	55
1385100				60
1543490	M4	7	6	6
1543504			8	8
1543512			10	10
1543520			12	12
1543539			14	14
1543547			16	16
1543555			18	18
1543563			20	20
1543571			9	25
1543598				30
1543601				35
1543628				40
1543636				45
1543644				50
1543652				55
1543660				60
1543679	M5	8	8	8
1543687			10	10
1543695			12	12
1543709			14	14
1543717			16	16
1543725			18	18
1543733			20	20
1543741			25	25
1543768			11	30
1543776				35
1543784				40
1543792				45
1543806				50
1543814				55
1543822				60
1113445				70
1234358				80
1543849	M6	10	10	10
1543857			12	12
1543865			14	14
1543873			16	16
1143662			18	18
1543881			20	20

jeśli b=L z pełnym gwintem

Article#	d ₁	s h11	b min.	L
1543903	M6	10	25	25
1543911			30	30
1543938			14	35
1543946				40
1543954				45
1543962				50
1543970				55
1543989				60
1115774				70
1266233				80
1266268				100