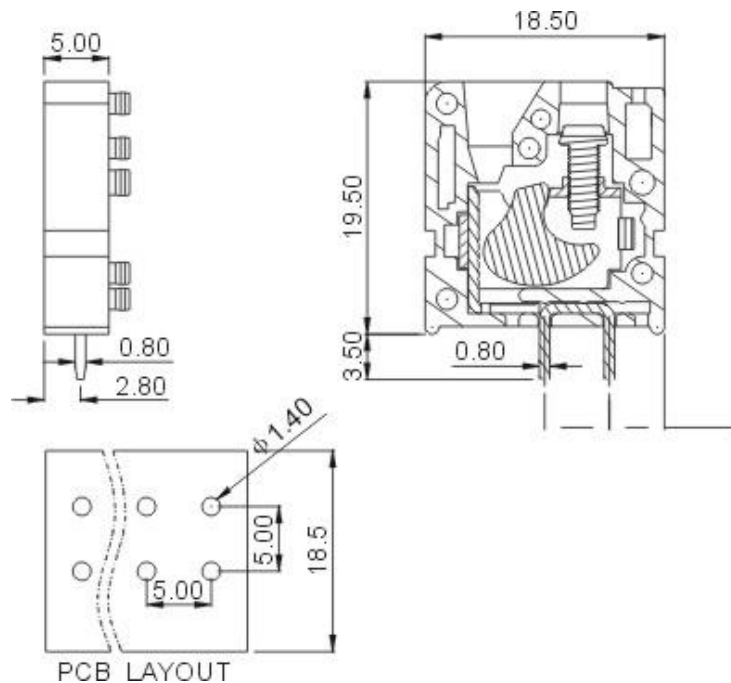


DG105V-5.0



APPROVAL
Electrical

Standard	UL	IEC
Rated voltage	300V	250V
Rated current	12A	24A
Wire range	30-12AWG	0.5-2.5mm ²
Withstanding voltage	AC2000V/1Min	

Mechanical

Torque	0.4Nm(3.5Lb-In)	
Ambient temperature	-40°C~+105 °C	
Strip length	9mm	

Dimensions

pitch	5.0mm(. 197")	
Poles	1P-XXP	

Material

Housing	PA66,UL94V-0	
Screws	M2.5,Steel, Cr ³⁺ Znplated	
Pin header	Copper,Tin-plated	
Cage	Steel,Cr ³⁺ Znplated	

HOW TO ORDER :




- **P** - -

X	X	X
Customer Request		

Series number | **No. of pole** | **Color**

1	Single pitch
2	Double pitch

1	Grey	4	Green	7	Trans Parent
2	Blue	5	Orange	8	Yellow
3	Black	6	Red	9	White

 mm (INCH)	 DEGSON ELECTRONICS CO., LTD.
 THIROANGLE PROJECTION	NAME DG105V-5.0