








DG130A-5.0
DG130A-5.08

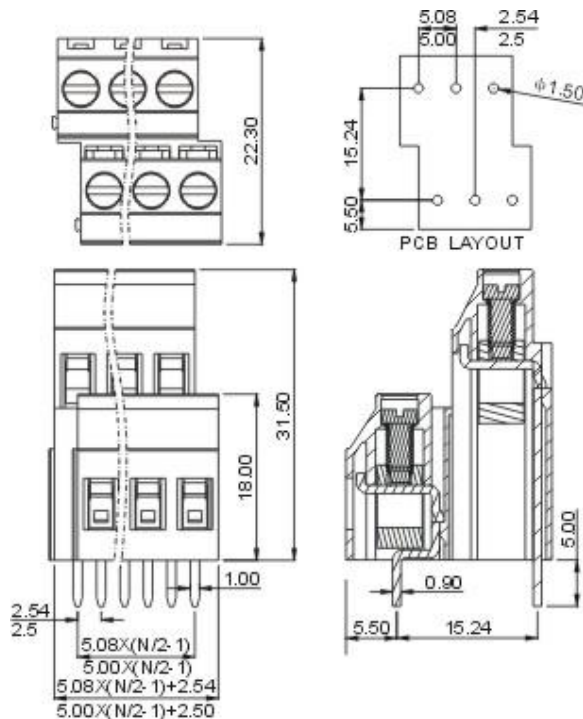

APPROVAL		
Electrical		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	20A	20A
Wire range	26-12AWG	0.5-2.5mm ²
Withstanding voltage	AC2500V/1Min	
Menchanical		
Torque	0.5Nm(4.4Lb-In)	
Ambient temperature	-40°C~+105 °C	
Strip length	7mm	
Dimensions		
pitch	5.0mm(.197") 5.08mm(.200")	
Poles	2*(2P,3P-24P)	
Material		
Housing	PA66,UL94V-0	
Screws	M3,Steel, Cr ³⁺ Znplated	
Pin header	Copper,Tin-plated	
Cage	Brass,Ni-plated	

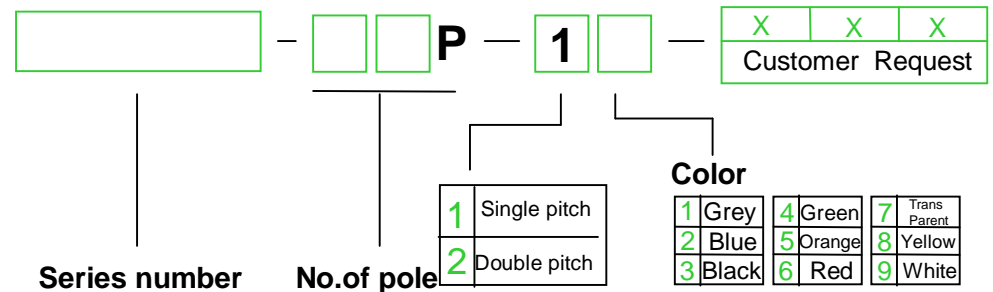HOW TO ORDER :



	 DEGSON ELECTRONICS CO., LTD.
	NAME DG130A-5.0 DG130A-5.08