





| | | |
|----------------------|---|-------------------------|
| Approval |   | |
| Electrical | | |
| Standard | UL | IEC |
| Rated voltage | 300V | 450V |
| Rated current | 7A | 9A |
| Wire range | 20-16AWG | 0.2-0.75mm ² |
| Withstanding voltage | AC2500V/1Min | |
| Mechanical | | |
| Ambient temperature | -40°C ~ +105 °C | |
| Strip length | 8.5-9.5mm | |
| Dimensions | | |
| Pitch | 5.0mm (.197") | |
| Poles | 1P-XXP | |
| Material | | |
| Housing | PA66,UL94V-0 | |
| Pin header | Brass, Tin plated | |
| Wire guard | Stainless steel | |



HOW TO ORDER :

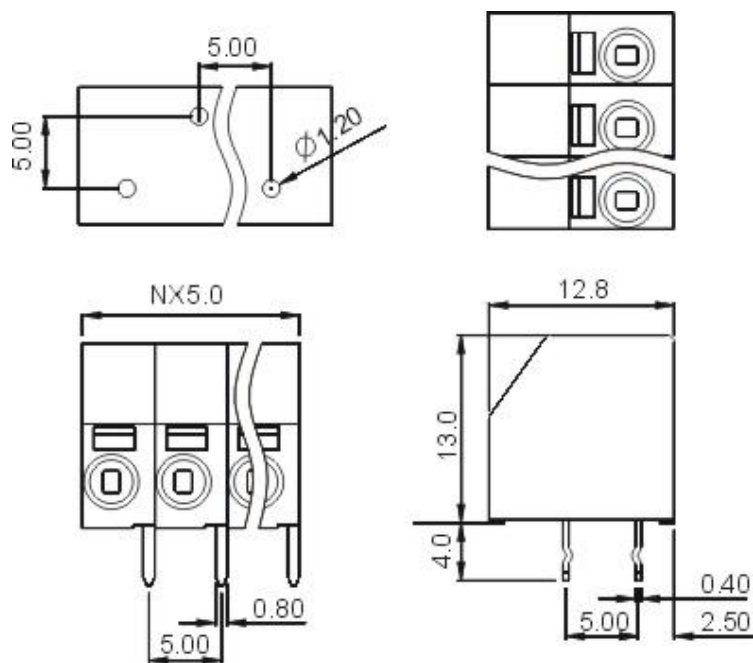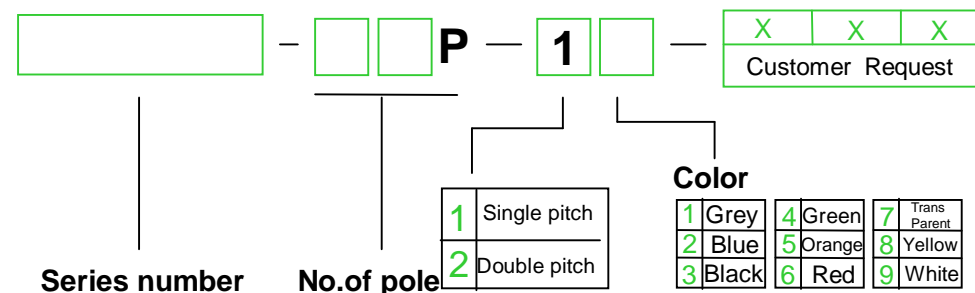

| | |
|---|---|
|  |  DEGSON ELECTRONICS CO., LTD. |
|  | NAME DG208-5.0 |