





**DG636-7.62**




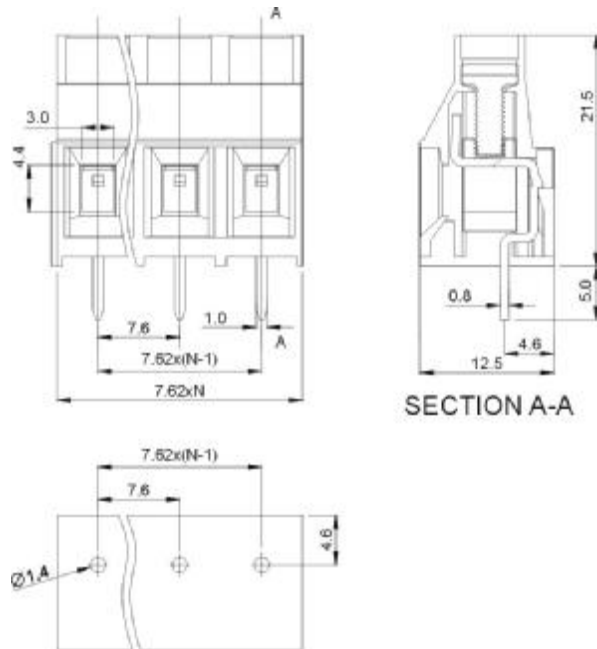

PCB LAYOUT

<b>APPROVAL</b>		
<b>Electrical</b>		
Standard	<b>UL</b>	<b>IEC</b>
Rated voltage	300V	630V
Rated current	30A	24A
Wire range	26-10AWG	4.0mm <sup>2</sup>
Withstanding voltage	AC3000V/1Min	
<b>Mechanical</b>		
Torque	0.5Nm(4.4Lb-In)	
Ambient temperature	-40°C ~ +105 °C	
Strip length	8mm	
<b>Dimensions</b>		
pitch	7.62mm(.300" )	
Poles	2P,3P-24P	
<b>Material</b>		
Housing	PA66,UL94V-0	
Screws	M3,Steel, Cr <sup>3+</sup> Znplated	
Pin header	Copper, Tin-plated	
Cage	Brass, Ni-plated	

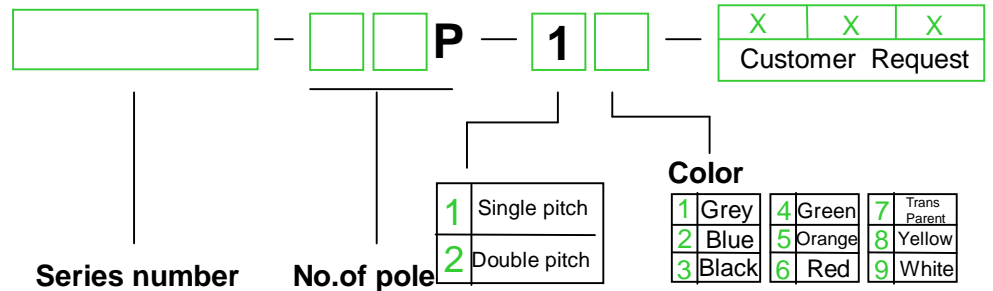**HOW TO ORDER :**



	 <b>DEGSON ELECTRONICS CO., LTD.</b>
	<b>NAME</b> <span style="float: right;"><b>DG636-7.62</b></span>