
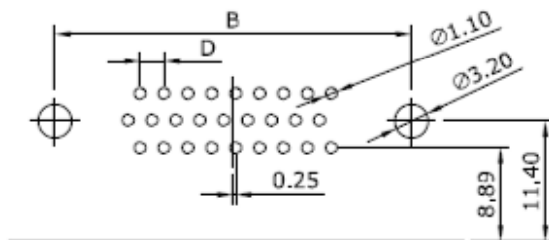


Specifications

Current Rating: 3A AC,DC
 Contact Resistance: 13mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 500V AC/minute
 Temperature Range: -55°C ~ +105°C

Material


Insulator: P.B.T, UL94V-0
 Contact: Copper Alloy

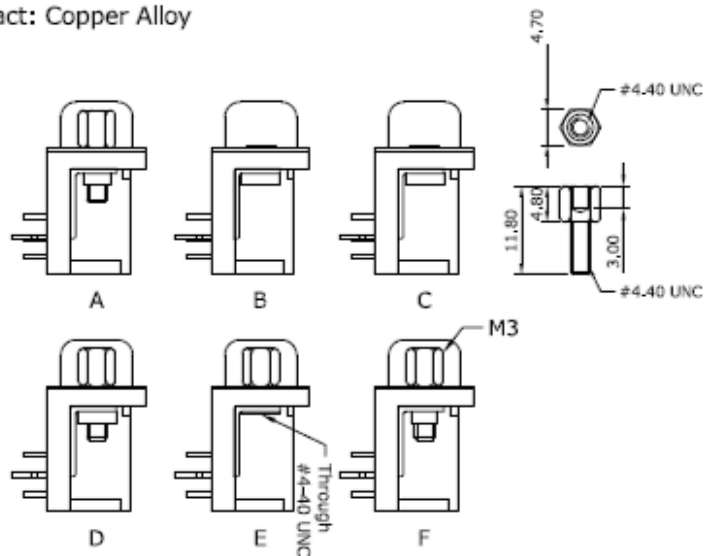

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

ORDER INFORMATION

VH D-SUB High Density Type	R Right Angle Type	X RoHS + P.B.T	1 -	F Female	XX Fork Grounding	1 X
G0:Gold Flash G1:Gold 3u" G2:Gold 5u" G3:Gold 10u" G4:Gold 15u" G5:Gold 30u"	S0:Selective Flash S1:Selective 3u" S2:Selective 5u" S3:Selective 10u" S4:Selective 15u" S5:Selective 30u"	No. of Contacts	A:Jack Screw Insert, Height=4.8 B:Rivet C:Rivet & Jack Screw Attached D:Rivet & Jack Screw Insert, Height=4.8 E:Front Rivet #4-40+Jack Screw Insert, Height=4.8 F:Front Rivet M3+Jack Screw, Height=4.8			

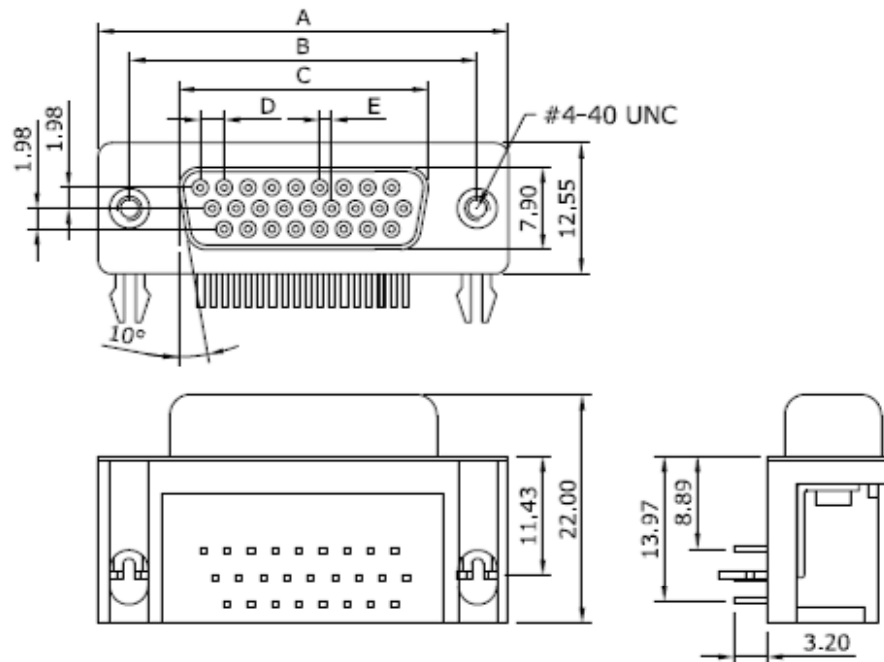

Positions	A	B	C	D	E
15	30.81	24.99	16.33	2.29	1.145
26	39.14	33.32	24.66	2.29	1.145
44	53.04	47.04	38.38	2.29	1.145
62	69.32	63.50	54.84	2.41	1.205



REV.	DESCRIPTION	DATA	TITLE: D-SUB High Density R/A Type Footprint 7.2mm	REV. A	品號 PART NO. VHRX1-FXX1X	日期 DATE 2008/07/20	圖號 DRAWING NO. VHRX1-FXX1X	繪圖 DRAWN Sayid	客戶品號 CUSTOMER P/N	核對 APPROVED Max
					公差 TOLERANCE .X ±0.25 .XX ±0.20	比例 SCALE FREE	單位 UNIT mm			