
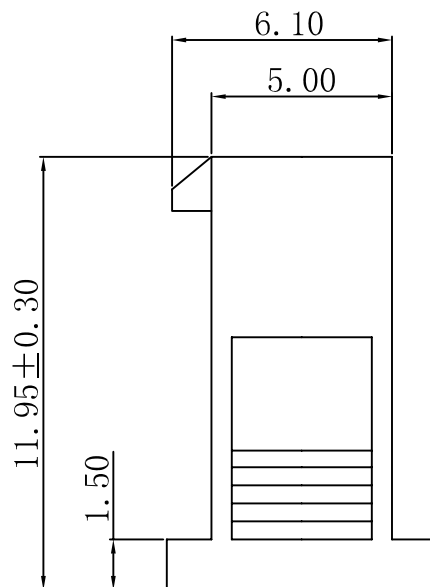
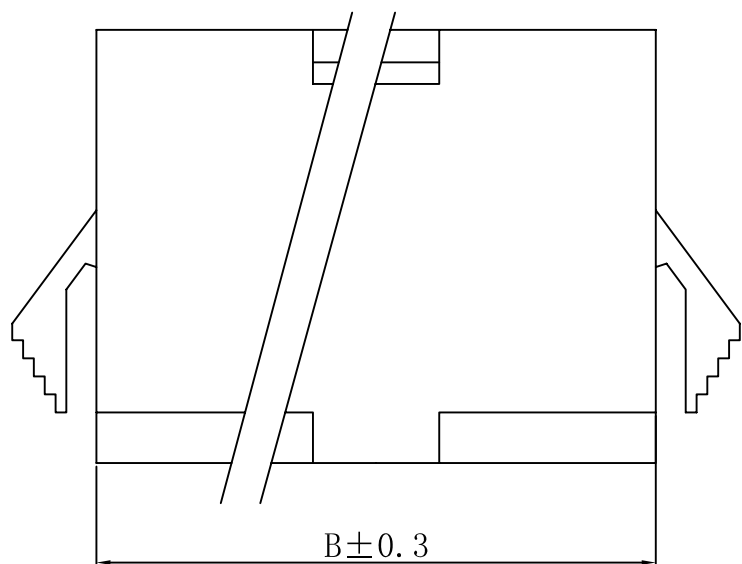


RoHS

REVISION DATE		
ITEM	DESCRIPTION	
A.0	Issue	2013 07 17

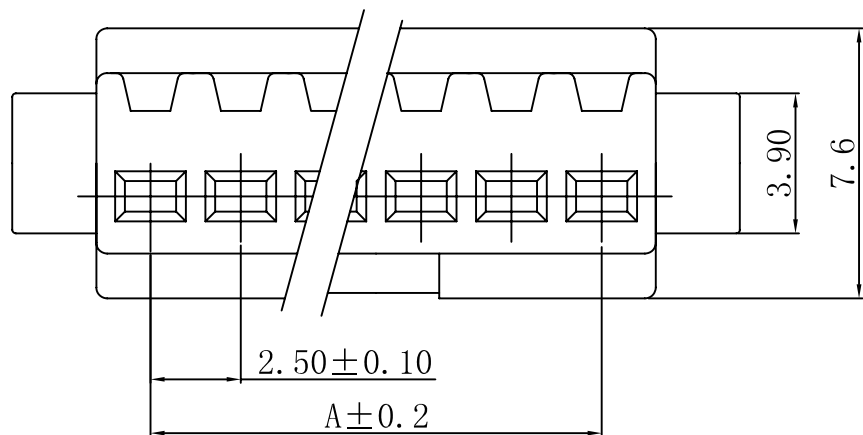


■ SPECIFICATIONS

- Voltage rating: 250V AC/DC
- Current rating: 3.0A AC/DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 500mΩ Min.
- Temperature range: -25°C - +85°C
- Contact resistance: 10mΩ Max.

■ HOUSING

- Part No.: JVT6503HN0-XX
- Poles: 02-12
- Material: PA66 UL94V-0
- Q'ty: 1000PCS/Bag

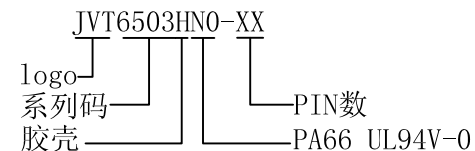

Poles	Dimension (mm)		Poles	Dimension (mm)	
	A	B		A	B
02	2.5	5.6	08	17.5	20.6
03	5.0	8.1	09	20.0	23.1
04	7.5	10.6	10	22.5	25.6
05	10.0	13.1	11	25.0	28.1
06	12.5	15.6	12	27.5	30.6
07	15.0	18.1			

投影 (PROJECT)		公差 (TOLERANCE)
单位 (UNIT)	mm	0 ± 0.40
比例 (SCALE)	1:1	0.0 ± 0.30
版本 (EDITION)	A.0	0.00 ± 0.20
日期 (DATE)	2013 07 17	0.000 ± 0.05

东莞市乔业电子有限公司  
DONG GUAN CHYAO YEE (JVT) CONNECTORS CO., LTD.

绘图 (DRAWN)	YongJun	品号 (PART NO)	JVT6503HN0-XX	页次 (PAGE)	
审核 (CHECKED)		图号 (DRAW NO)	048-6503-01	1/1	
核准 (APPROVE)		品名 (NAME)	SMP 2.50mm Male HSG		