

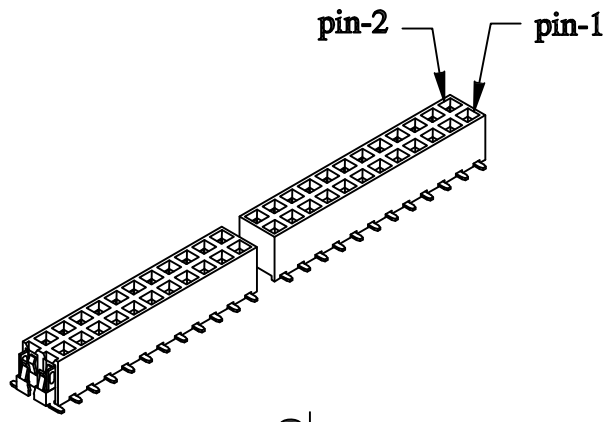
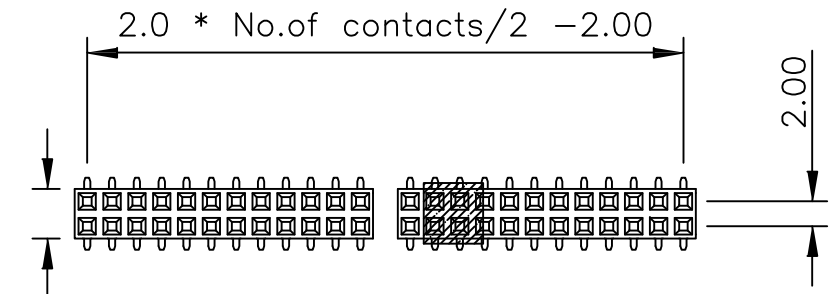


1

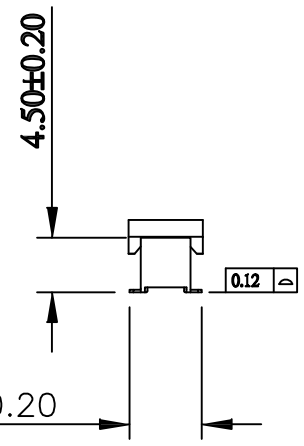

- SPECIFICATION
- Current Rating: 2Amp
 - Dielectric Withstanding: 500V AC
 - Contact resistance: 20mΩ max
 - Insulation resistance: 1000MΩ min
 - Operating Temperature: -40° C ~ +85° C
 - Max Processing Temp: 230° C for 60 seconds
260° C for 10 seconds
 - Contact Material: Phosphor Bronze
 - Insulation Material: Polyester, UL 94V-0
Standard: Nylon-6T
 - Finish: Tin, Gold Plated
Standard: Gold Flash all over

2

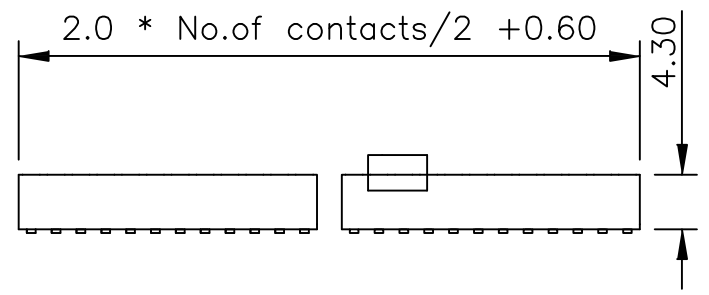

JVT2051H436T-2*XXC-S

胶壳高度4.3mm

6T-PA6T


SMT

C-带盖子


PIN数

3

Dim.A 6.15±0.20

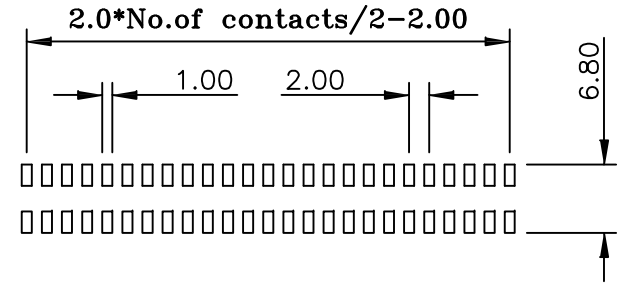

4

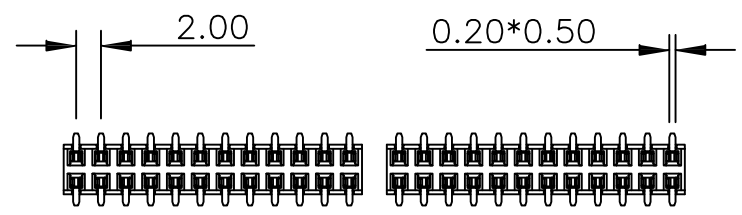

Recommended P.C. Board
SMD Layout

GENERAL TOLERANCE	
0	±0.35
.0	±0.30
.00	±0.20
.000	±0.10

版本	变更内容	日期	单位	mm	比例	1:1	日期	20130514
----	------	----	----	----	----	-----	----	----------



核准	审核	绘图	品名	2.0排母H4.3mm 双排180° SMT 带盖子		
	chen	TONY	料号	JVT2051H436T-2*XXC-S		
			图名	004	版本	A