


9001 Series

DIN41612 C Type Press Fit 3 Rows Female

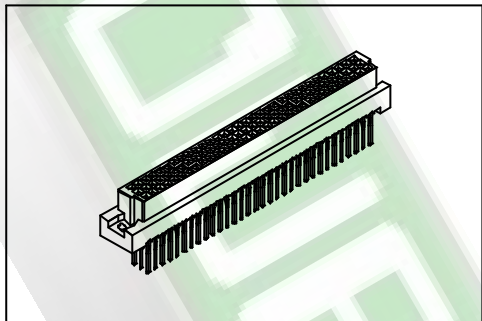

Material:

Housing: 30% Glass filled PBT UL94V-0

Contacts: Phosphor Bronze.

Electrical Characteristics:

Current Rating: 2 AMP.

Dielectric Withstanding Voltage: AC 1000V For 1 minute.





Insulator Resistance: 1000M Ω min. at DC 500V.

Contact Resistance: 30m Ω max. at DC 100mA.

Operating Temperature: -55°C ~ +105°C.

Features:

- * UL, cUL listing.
- * Mate with Male 3Row
9001-1196, 1164 C Type.
9001-1396, 1364 R Type.

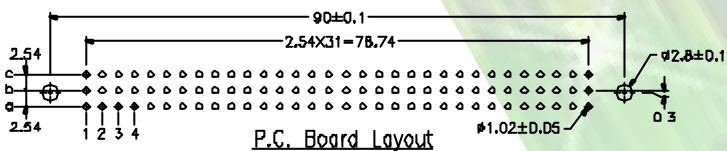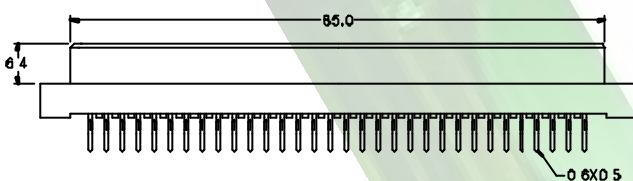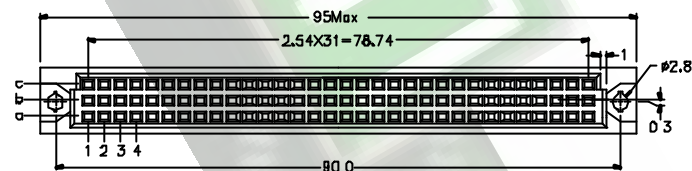

Pitch	Position	X length		Rows with Contacts	Contact Arrange
		1	2		
2.54mm	96	4,6	6,3	a b c	
	64			a - c	
	32			a - -	
5.08mm	48			a b a	
	32			a - c	
	16			a - -	

Ordering information

<u>9001-1</u>	<u>2</u>	<u>96</u>	<u>1</u>	<u>C</u>	<u>10</u>	<u>P</u>	<u>L1</u>
Series 1: 2.54mm 2: 5.08mm	2: Female	Position	1: Dip Length 2: Dip Length W1: Dip Length W2: Dip Length	C: Dip Tin Contact Gold G: Gold	Blank: Gold Flash 10: 10 μ " 15: 15 μ " 30: 30 μ "	P: Press Fit	Blank: W/D Lock L1: With Lock See Page CA04

*Standard Gold Flash.