

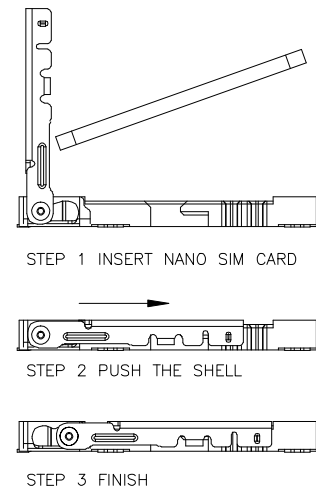
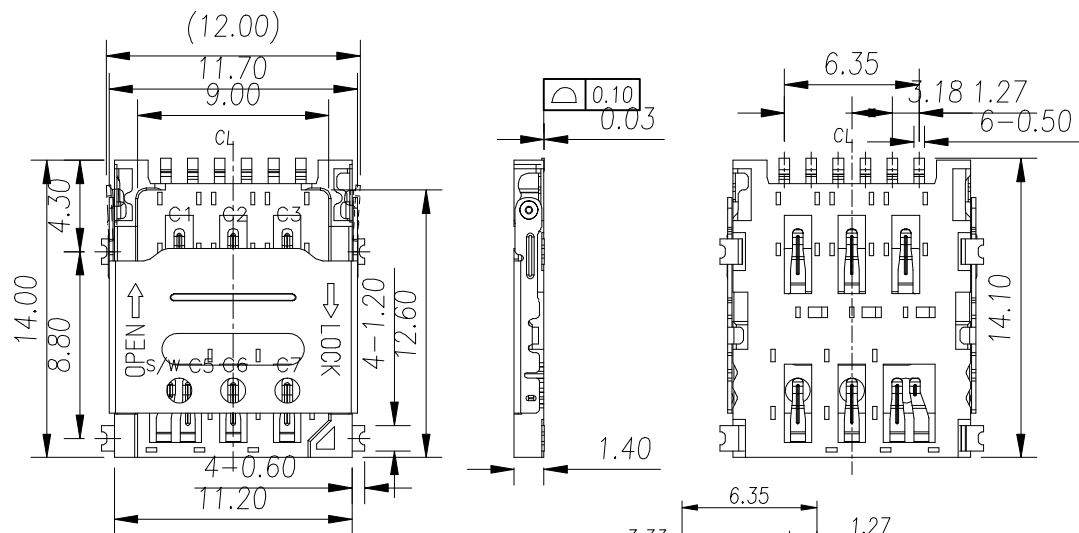


REV.	ECN.NO.	MODIFY.CONTENT	DATE

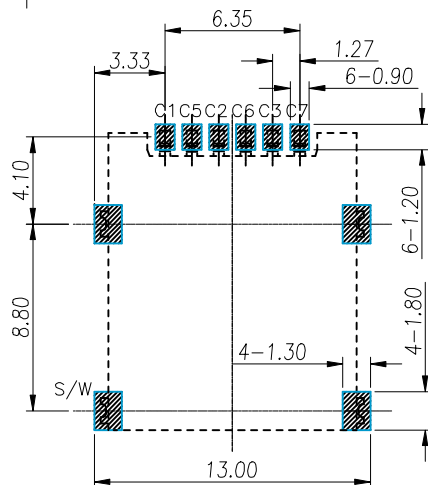


NOTES:


1. MATERIAL:
 - 1.1 Housing:High Temperature Thermoplastic UL94V-0; Color Black.
 - 1.2 Terminal:Copper Alloy,T=0.12mm.
 - 1.3 Shell:Stainless Steel,T=0.20mm.
2. FINISH:
 - 2.1 Terminal:Plated Gold on the Contact Area and Solder Tails
 - 2.2 Peg:Plated Gold on the Solder Tails.
3. SPECIALITY:
 - 3.1 Rated current:0.5A
 - 3.2 Rated voltage:50V
 - 3.3 Contact Resistance:50mΩ MAX
 - 3.4 Insulation Resistance:100MΩMIN 100V DC
 - 3.5 Dielectric withstanding voltage: 100V AC.
 - 3.6 Durability Cycles: 5000 Cycles.
 - 3.7 Solder ability:245±5°C,5±0.5s.
 - 3.8 Operating condition:Temperature: -30°C~+80°C Humidity: 80% R.H MAX

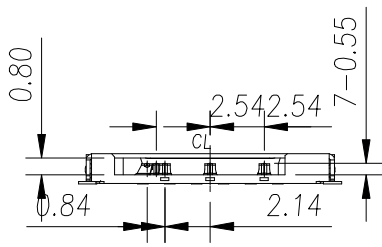

RECOMMENDED PCB LAYOUT
TOLERANCE ±0.05
SMT SOLDER AREA

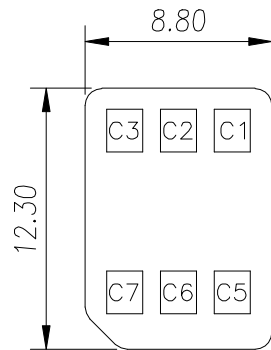

PIN NO.	PIN NAME
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O
S/W	Switch Pin

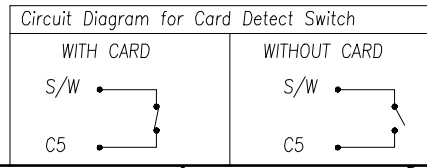

GENERAL TOLERANCE	图号	LZA1602-001DCX	设计	规格	比例	1:1
X.±0.35	x.'±5'	品名 1.4H NANO SIM CARD HINGE TYPE	审核	单位	mm	mm
.X±0.30	.x'±2'		核准	规格	mm	
.XX±0.25	.xx'±1'	料号 ASMFS150B01BR102	日期	2015/12/15	版本	A
.XXX±0.15	.xxx'±0.5'	东莞市捷圣泰电子科技有限公司 Dongguan JASSTA Electronics Co., LTD				
页号	1/1					