




# DEGSON ELECTRONICS CO., LTD.

## Product Specification



**8EDGK-5.0    8EDGK-5.08**  
**8EDGK-7.5    8EDGK-7.62**

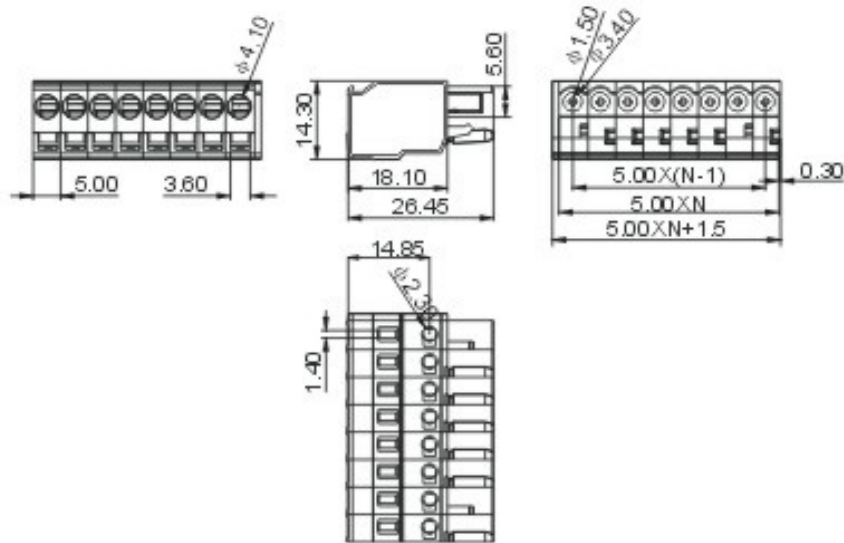


| Approval              | UL            | CE                 |
|-----------------------|---------------|--------------------|
| <b>Electrical</b>     |               |                    |
| Standard              | UL            | IEC                |
| Rated voltage         | 300V          | 320V,400V          |
| Rated current         | 15A           | 20A                |
| Wire range            | 22-14AWG      | 2.5mm <sup>2</sup> |
| With standing voltage | AC2500V/1 Min |                    |

| Mechanical          |              |
|---------------------|--------------|
| Ambient temperature | -40°C~+105°C |
| Strip length        | 8-9mm        |

| Dimensions |  |
|------------|--|
| Pitch      | 5.0 mm (.197") 5.08mm (.200") 7.5mm (.295") 7.62mm (.300") |
| Poles      | 2P-24P                      2P-12P                         |

| Material   |                 |
|------------|-----------------|
| Housing    | PA66, UL94V-0   |
| Contact    | Phosphor bronze |
| Wire guard | Stainless steel |

### HOW TO ORDER

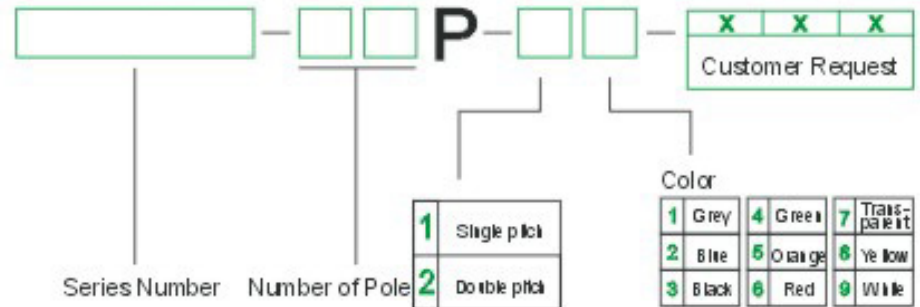

|                  |                            |  |
|------------------|----------------------------|--|
| <br>MM<br>(INCH) | <br>THREADED    FRONT VIEW | <br><b>DEGSON ELECTRONICS CO., LTD.</b>                          |
| NAME             |                            | <b>8EDGK-5.0    8EDGK-5.08</b><br><b>8EDGK-7.5    8EDGK-7.62</b> |