


PART NO.: 2EGTK-7.62

- Pluggable Terminal Block,
- Nominal Current (IEC): 20A
- Rated Voltage (IEC): 400V
- Number of Positions: 2P-12P
- Standard Color: Green
- Contact Surface: Tin
- Connection Method: Screw Connection

DRAWINGS:

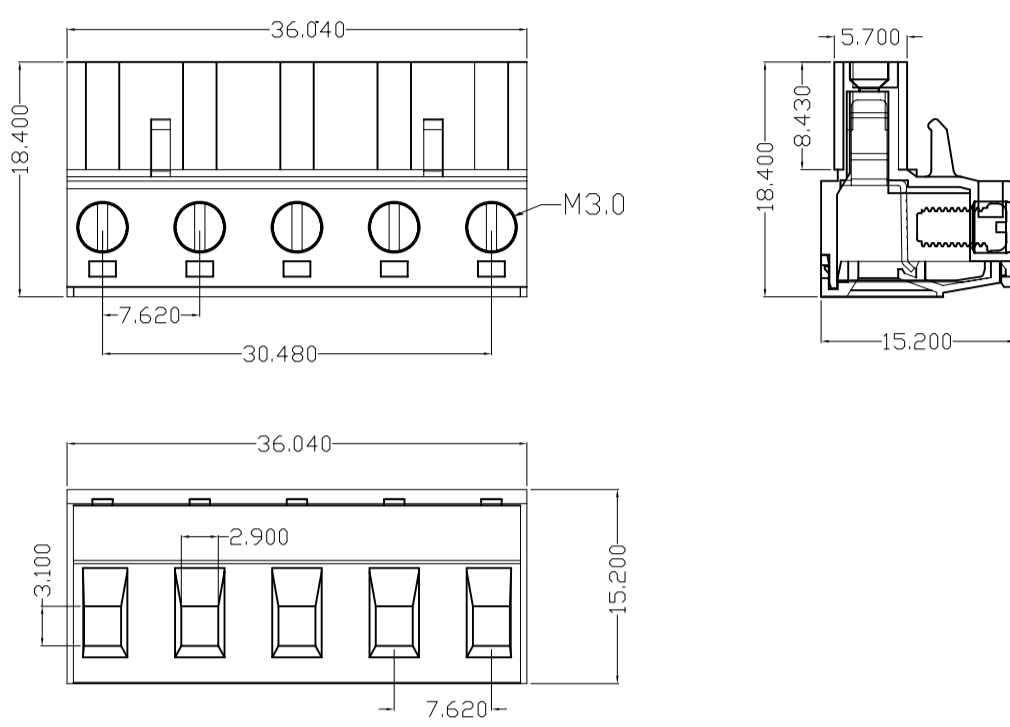

TECHNICAL DATA:

Electrical		
Standard	UL	IEC
Rated voltage	300V	400V
Rated current	15A	20A
Wire range	28-12AWG	2.5mm ²
With standing voltage	4.0KV	
Mechanical		
Torque	0.4Nm(3.5Lb-In.)	
Ambient temperature	-40°C~+105°C	
Strip length	7mm	
Dimensions		
Pitch	7.62mm(.300")	
Poles	2P-12P	
Material		
Housing	PA66,UL94V-0	
Screws	M3,steel,Cr ³⁺ Zn Plated	
Pin header	Phosphor bronze	
Wire guard	Brass,Ni plated	


APPLICATION:

Elevator, Industry, Security, Instrument, Machinery, Energy, Communication, Lighting, Construction, Electrical

MATCHING PARTS:

	male parts	2EGTVC-7.62	2EGTRC-7.62
female parts		•	•
2EGTK-7.62			

HOW TO ORDER:

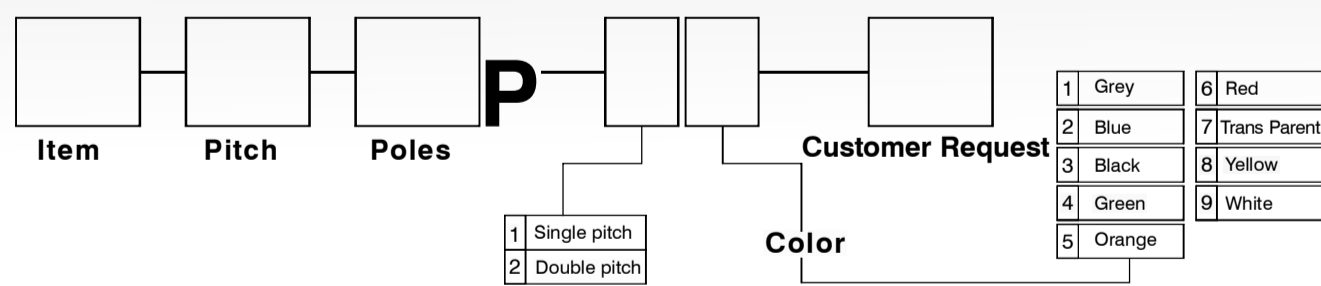

PACKING:

Item	Number of Poles	PCS/Box A	PCS/Box B	PCB/Carton	GW/CTNS(KG)
2EGTK-7.62	2		800	3200	13
	3		500	2000	12
	4		400	1600	13
	5		625	2500	24
	6		500	2000	24
	7		450	1800	23
	8		350	1400	21
	9		300	1200	20
	10		275	1100	21
	11		250	1000	21
	12		250	1000	22

Remark: Box A Dimension: 20*13.5*7(cm); Box B Dimension: 26*20*10(cm)
Carton Dimension: 42*28*23(cm)