






15EDGKC-3.81

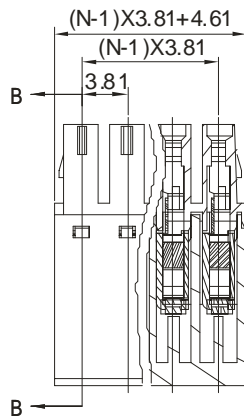



Section A-A






Section B-B



APPROVAL		
Electrical		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	7A
Wire range	28-16AWG	0.5-1.5mm ²
Withstanding voltage	AC2000V/1Min	
Mechanical		
Torque	0.2Nm(1.7Lb-In)	
Ambient temperature	-40°C~+105°C	
Strip length	9mm	
Dimensions		
Pitch	3.81mm(.150")	
Poles	2P-24P	
Material		
Housing	PA66,UL94V-0	
Screws	M2,Steel,Cr ³⁺ Zn-plated	
Contact	Phosphor bronze	
Cage	Steel,Cr ³⁺ Zn-plated	

HOW TO ORDER :

			P	1		X	X	X				
						Customer Request						
Series number	No. of pole					Color						
	1	2	Single pitch	1	2	3	4	5	6	7	8	9
			Double pitch	Grey	Blue	Black	Green	Orange	Red	Trans Parent	Yellow	White

	 DEGSON ELECTRONICS CO., LTD.
	NAME 15EDGKC-3.81