






DEGSON ELECTRONICS CO., LTD.

Product Specification

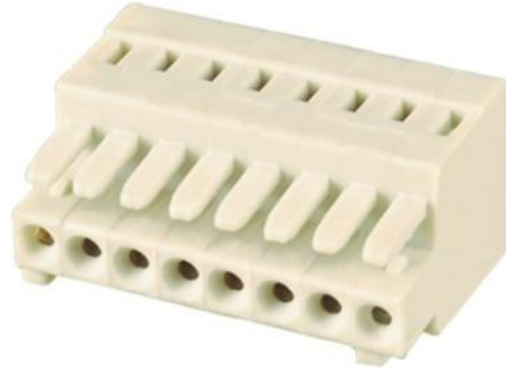


8EDGK-2.5

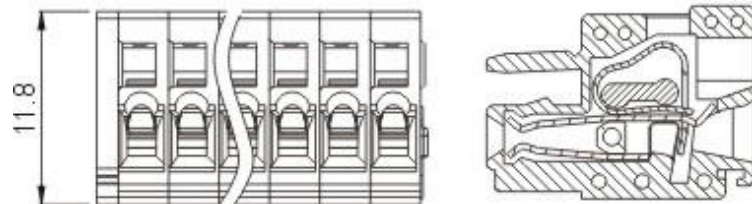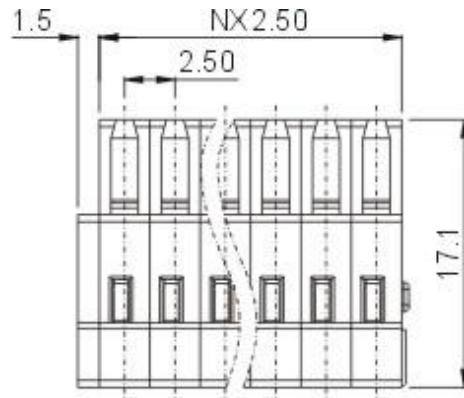

| | | |
|-----------------------|-----------------|------------------------|
| Approval | | |
| Electrical | | |
| Standard | UL | IEC |
| Rated voltage | 150V | 130V |
| Rated current | 4A | 6A |
| Wire range | 28-20AWG | 0.2-0.5mm ² |
| With standing voltage | AC1250V/1Min | |
| Mechanical | | |
| Ambient temperature | -40°C~+105 °C | |
| Strip length | 5-6mm | |
| Dimensions | | |
| Pitch | 2.5mm(.098") | |
| Poles | 2P-24P | |
| Material | | |
| Housing | PA66,UL94V-0 | |
| Contact | Phosphor bronze | |
| Wire guard | Stainless steel | |

HOW TO ORDER :

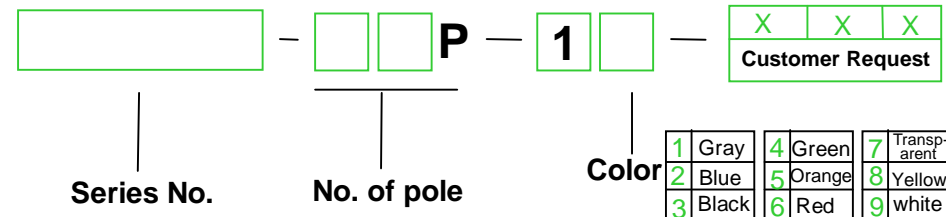

| | |
|--------------------------|---|
| mm (INCH) | DEGSON ELECTRONICS CO., LTD. |
| THROANGLE PROJECTION | NAME 8EDGK-2.5 |