



**Model**

**ESPE 1212 W2E**

**Output**

Voltage	Current	Power
<b>12Vdc</b>	<b>1A</b>	<b>12W</b>

**CE**

EMC	2014/30/EU
LVD	2014/35/EU EN 60950-1:2006+A11+A1+A12+A2

**M.T.B.F.**

50.000 h Calculated Hours at 25°C

**Output Characteristics:**

Voltage	Min. Load	Rated. Load	peak Load	Output Power
12Vdc	0.00A	1A	1.3A (30sec)	12W

**Combined Load/Line Regulation**

Voltage	Min. Load	Rated. Load	Line Regulation	Load Regulation
12Vdc	0.00A	1A	+/- 3%	+/-5%

**Ripple and Noise (Max.)**

<150mV p-p

**Efficiency:**

Energy Star Compliance: Level VI 75,20%

**Standby Power**


0.1W max

**Protection Function**

Short circuit protection / Over current protection / Over load protection

**Input Characteristics:**

Voltage	Frequency	Current	Inrush Current	Ac Leakage Current
100-240 Vac	50/60Hz	0.3Amps	40 Amps Max.	0.25mA Max. At 264Vac

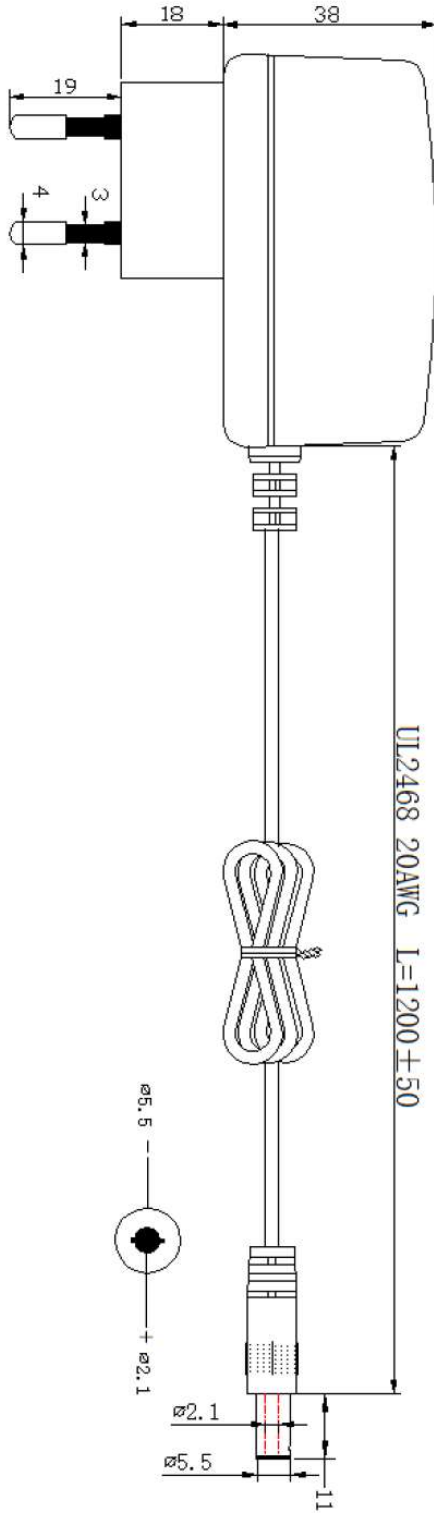

Model	Optional DC plug
ESPE 1212-W2E	2.1x5.5mm
ESPE 1212-W2E-0723	0.7x2.35mm
ESPE 1212-W2E-1130	1.1x3.0mm
ESPE 1212-W2E-1135	1.1x3.5mm
ESPE 1212-W2E-1335	1.3x3.5mm
ESPE 1212-W2E-1740	1.7x4.0mm
ESPE 1212-W2E-1748	1.7x4.8mm
ESPE 1212-W2E-1755	1.7x5.5mm
ESPE 1212-W2E-2555	2.5x5.5mm
ESPE 1212-W2E-3055	3.0x5.5mm - center pin