







**Model**  
**ESPE 9012 P3**

Output		
Voltage	Current	Power
<b>12V</b>	<b>7.5A</b>	<b>90W</b>
CE		
EMC	2014/30/EU	
LVD	2014/35/EU EN 60950-1:2006+A11+A1+A12+A2	
M.T.B.F.		
50.000 h Calculated Hours at 25°C		

Output Characteristics:				
Voltage	Min. Load	Rated. Load	peak Load	Output Power
12Vdc	0.00A	7.5A	8A (30sec)	90W
Combined Load/Line Regulation				
Voltage	Min. Load	Rated. Load	Line Regulation	Load Regulation
12Vdc	0.00A	7.5A	+/- 3%	+/-8%
Ripple and Noise (Max.)				
<200mV p-p				
Efficiency:				
Energy Star Compliance: Level VI 85%				
Standby Power				
0.5W max				
Protection Function				
Short circuit protection / Over current protection / Over load protection				

Input Characteristics:				
Voltage	Frequency	Current	Inrush Current	Ac Leakage Current
100-240 Vac	50/60Hz	2Amps	50 Amps Max.	0.25mA Max. At 264Vac

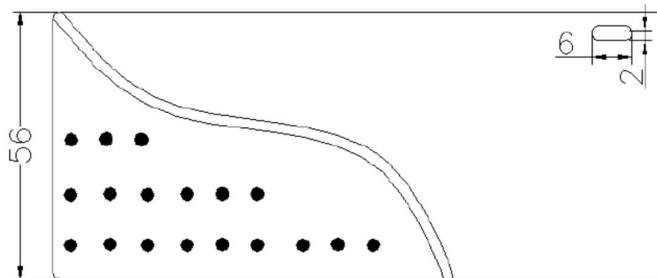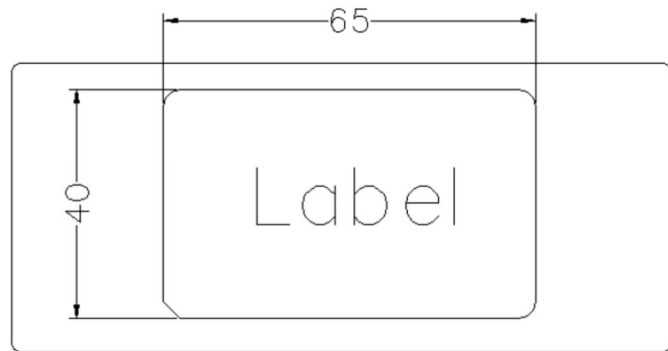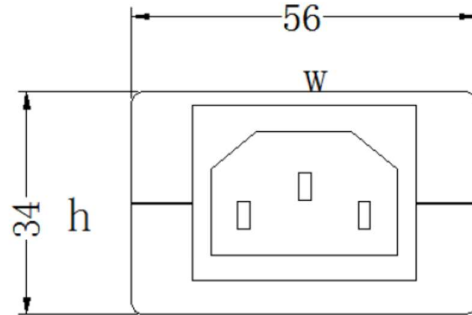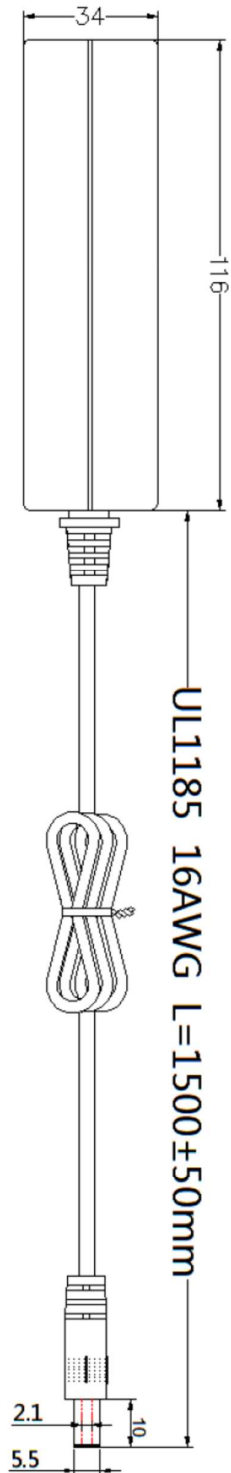

Model	Optional DC plug
ESPE 9012-P3	2.1x5.5mm
ESPE 9012-P3-0723	0.7x2.35mm
ESPE 9012-P3-1130	1.1x3.0mm
ESPE 9012-P3-1135	1.1x3.5mm
ESPE 9012-P3-1335	1.3x3.5mm
ESPE 9012-P3-1740	1.7x4.0mm
ESPE 9012-P3-1748	1.7x4.8mm
ESPE 9012-P3-1755	1.7x5.5mm
ESPE 9012-P3-2555	2.5x5.5mm
ESPE 9012-P3	3.0x5.5mm - center pin