

inserts:		page
CD	50 poles + ⊕	44
CDD	76 poles + ⊕	57
CDA	32 poles + ⊕	70
CDC	32 poles + ⊕	71

insert centre distance:
2 x (66 x 16) mm

bulkhead mounting housings with 2 levers or 4 pegs



surface mounting housings with 2 levers or 4 pegs




description	part No.		part No.		part No.	
				entry Pg		entry M
with levers	CHI 50					
with pegs and cover ¹⁾	CHI 50 CS					
with levers			CHP 50.21	21	MHP 50.32	32
with levers			CHP 50.221	21 x 2	MHP 50.232	32 x 2
with levers			CHP 50.29	29	MHP 50.40	40
with levers			CHP 50.229	29 x 2	MHP 50.240	40 x 2
with pegs and cover ¹⁾			CHP 50 CS	21	MHP 50 CS32	32
with pegs and cover ¹⁾			CHP 50 CS2	21 x 2	MHP 50 CS232	32 x 2
with pegs and cover ¹⁾			CHP 50 CS29	29	MHP 50 CS40	40
with pegs and cover ¹⁾			CHP 50 CS229	29 x 2	MHP 50 CS240	40 x 2

¹⁾ May be combined with hoods:
- CHO/CAO 50 X and CAV 50 X
- MHO/MAO/MFO 50 X and MAV/MFV 50 X


N.B.: the enclosures ensure IP66 protection (or IP65 cover versions) rating when mated and locked with the closing levers.
The cover (CS, CP) only ensures mechanical protection, but does not ensure IP65 protection rating.

panel cut-out for bulkhead mounting housings in mm

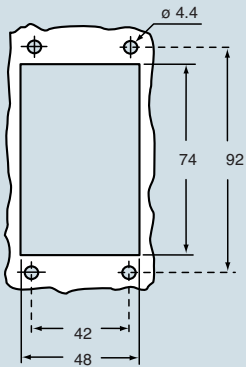


dimensions in mm

CHI

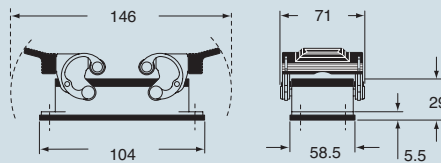


CHI CS

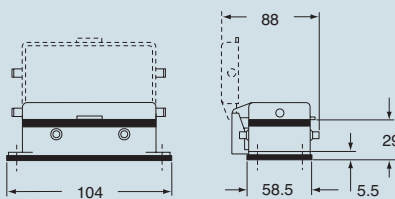


dimensions in mm

CHP and MHP

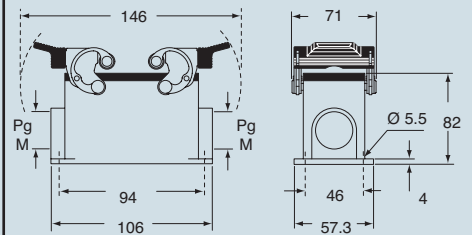

CHP CS and MHP CS

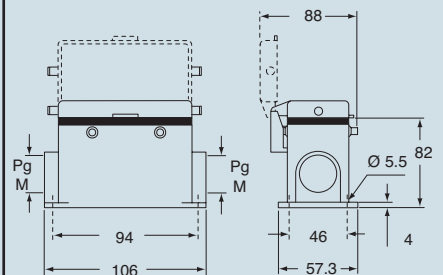

CAUS® Type 4/4X/12

dimensions indicated are not binding and may be changed without notice

size 66.40



inserts:		page
CD	50 poles + ⊕	44
CDD	76 poles + ⊕	57
CDA	32 poles + ⊕	70
CDC	32 poles + ⊕	71

insert centre distance:
2 x (66 x 16) mm

hoods with 4 pegs



hoods with 2 levers or 4 pegs




description	hoods with 4 pegs		hoods with 2 levers or 4 pegs	
	part No.	entry Pg	part No.	entry M
with pegs, side entry	CHO 50	21	MHO 50.25	25
with pegs, side entry			MHO 50.32	32
with pegs, side entry, high construction	CAO 50.21	21	MAO 50.25	25
with pegs, side entry, high construction	CAO 50.29	29	MAO 50.32	32
with pegs, top entry, high construction			CAV 50.21	21
with pegs, top entry, high construction			CAV 50.29	29
with levers and gasket, top entry, high construction			CAV 50 G29	29
with levers and gasket, top entry, high construction			MAV 50 G32	32
with pegs, side entry, high constr., without adaptor *	CFO 50.21	21	MFO 50.25	25
with pegs, side entry, high constr., without adaptor *	CFO 50.29	29	MFO 50.32	32
with pegs, top entry, high constr., without adaptor *			CFV 50.21	21
with pegs, top entry, high constr., without adaptor *			CFV 50.29	29
with levers and gasket, top entry, high constr., without adaptor *			CFV 50 G29	29
			MFV 50 G32	32

* enclosure without adaptor, threaded on the body, to be used only with a complete cable clamp.


dimensions in mm

CHO (CAO/CFO) and MHO (MAO/MFO)

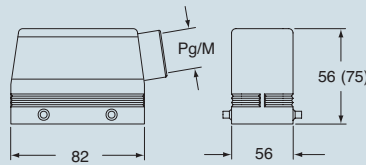


dimensions in mm

CAV (CFV) and MAV (MFV)

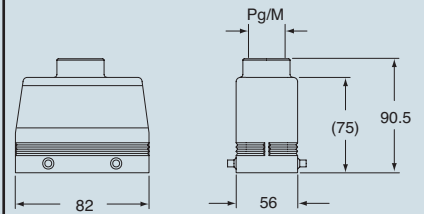

CAV G (CFV G) and MAV G (MFV G)

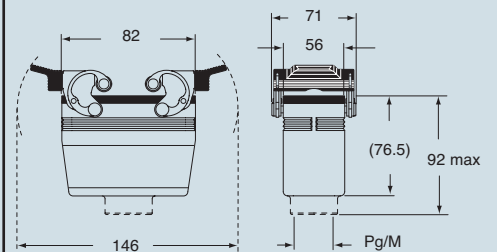

CALUS® Type 4/4X/12

dimensions indicated are not binding and may be changed without notice

size 66.40

inserts:		page
CD	50 poles + ⊕	44
CDD	76 poles + ⊕	57
CDA	32 poles + ⊕	70
CDC	32 poles + ⊕	71

insert centre distance:
2 x (66 x 16) mm

Covers CHCW 50 and CHCW 50 G versions are not suitable to be used with code pins. If this application is required please contact ILME SpA.

hoods with 2 levers



covers




description	part No.		part No.		part No.
		entry Pg		entry M	
with levers, side entry ¹⁾	CHO 50 X	21	MHO 50 X25	25	
with levers, side entry ¹⁾			MHO 50 X32	32	
with levers, side entry, high construction ¹⁾	CAO 50 X	21	MAO 50 X25	25	
with levers, side entry, high construction ¹⁾	CAO 50 X29	29	MAO 50 X32	32	
with levers, top entry, high construction ¹⁾	CAV 50 X	21	MAV 50 X25	25	
with levers, top entry, high construction ¹⁾	CAV 50 X29	29	MAV 50 X32	32	
with levers, side entry, high construction, without adaptor ^{1)*}	CFO 50 X	21	MFO 50 X25	25	
with levers, side entry, high construction, without adaptor ^{1)*}	CFO 50 X29	29	MFO 50 X32	32	
with levers, top entry, high construction, without adaptor ^{1)*}	CFV 50 X	21	MFV 50 X25	25	
with levers, top entry, high construction, without adaptor ^{1)*}	CFV 50 X29	29	MFV 50 X32	32	
cover with 4 pegs (for housings with 2 levers)					CHC 50
cover with 2 levers (for hoods with 4 pegs)					CHC 50 G

¹⁾ May be combined with housings:
- CHI 50 CS, CHP 50 CS and MHP 50 CS


* enclosure without adaptor, threaded on the body, to be used only with a complete cable clamp.

dimensions in mm

CHO X (CAO X/CFO X) and MHO X (MAO X/MFO X)

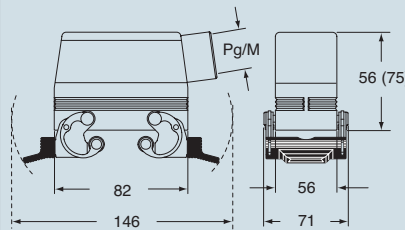

CAV X (CFV X) and MAV X (MFV X)

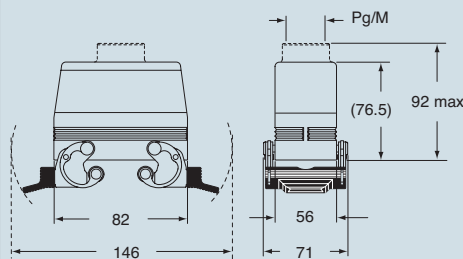


dimensions in mm

CHC



CHC G

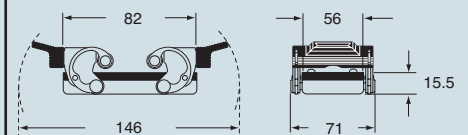

CAUS® Type 4/4X/12

dimensions indicated are not binding and may be changed without notice




inserts:		page
CD	50 poles + ⊕	44
CDD	76 poles + ⊕	57
CDA	32 poles + ⊕	70
CDC	32 poles + ⊕	71

insert centre distance:
2 x (66 x 16) mm

Covers CHCW 50 and CHCW 50 G versions are not suitable to be used with code pins. If this application is required please contact ILME SpA.

housings and cover

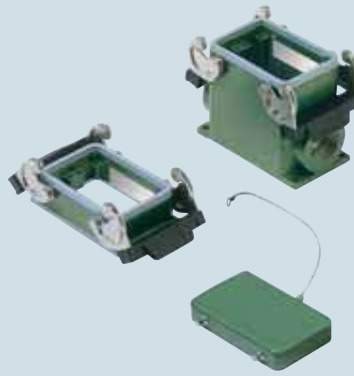


hoods and cover




description	part No.		part No.		part No.		part No.	
	entry Pg	entry M	entry Pg	entry M	entry Pg	entry M	entry Pg	entry M
bulkhead housing, with levers	CHIW 50	--	MHPW 50.32	32				
surface housing, with levers	CHPW 50.21	21	MHPW 50.250	50 x 2				
surface housing, with levers	CHPW 50.229	29 x 2						
cover with 4 pegs (for housings with 2 levers)	CHCW 50							
with pegs, side entry					CHOW 50	21	MHOW 50.25	25
with pegs, side entry							MHOW 50.32	32
with pegs, side entry, high construction					CAOW 50.29	29	MAOW 50.32	32
with pegs, top entry, high construction					CAVW 50.29	29	MAVW 50.32	32
cover with 2 levers (for hoods with 4 pegs)					CHCW 50 G			

panel cut-out for bulkhead mounting housings in mm

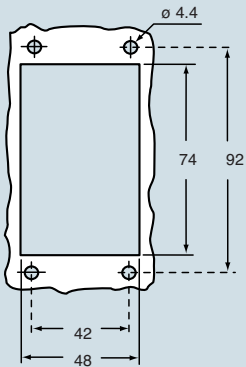


dimensions in mm

CHIW

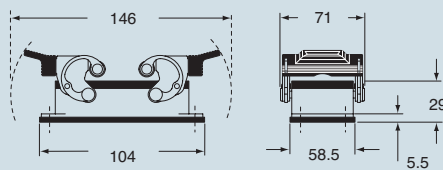

CHPW and MHPW

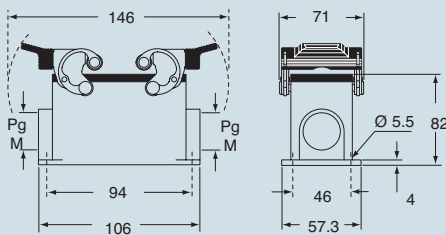


CHCW




dimensions in mm


CHOW (CAOW) and MHOW (MAOW)

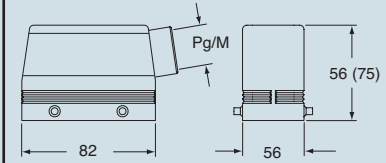

CAVW and MAVW

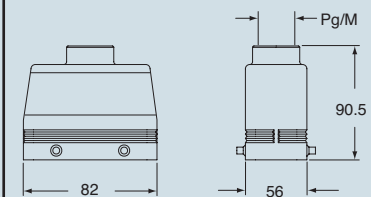

CHCW G

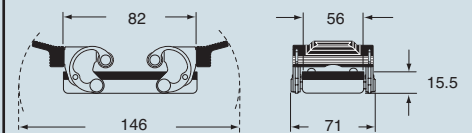

CAUS® Type 4/4X/12

dimensions indicated are not binding and may be changed without notice

size 66.40