
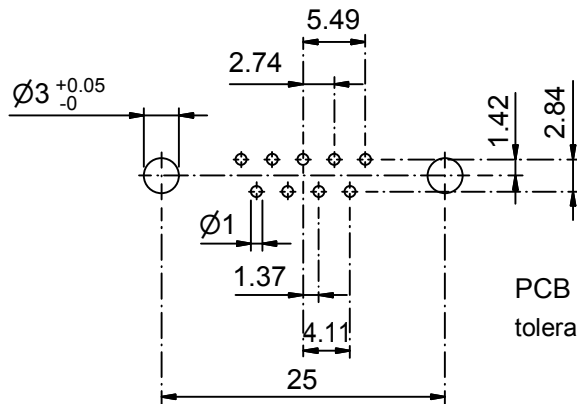

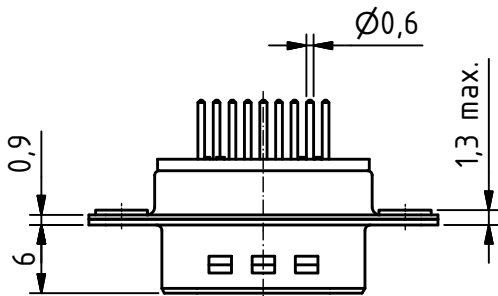



RoHS compliant

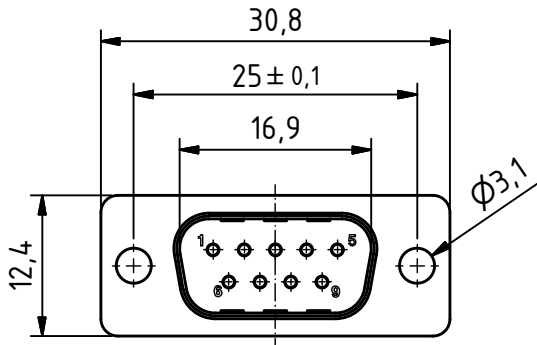

PCB Layout
tolerances +/-0.1

Capacitor value 2'200 pF

MATERIALS

- Insulator: Thermoplastic UL 94-V-0 black
- Contact: Copper alloy
- Contact finish: Quality class 2
- Shell: steel tin plated

CHARAKTERISTICS

- Working voltage: 100V
- Current rating: 5A
- Contact resistance: max. 10mΩ - DIN41652
- Insulation resistance: >1GΩ
- Temperature range: -55° to +125°C

General tolerances (Deltron standard)			
size in mm	> 0.5 up to 3	> 3 up to 6	> 6 up to 30
tolerances	±0.1	±0.2	±0.3

modification	Rev.	Rev.	Rev.	DE005104 part no.		
	Rev.	Rev.	Rev.			
D09PY/2FP222	1.5:1 scale	drawn	24.04.2015	mr		
		checked				
		approved				
 Industrie Neuhof 8c CH-3422 Kirchberg		K052063 drawing no.				