
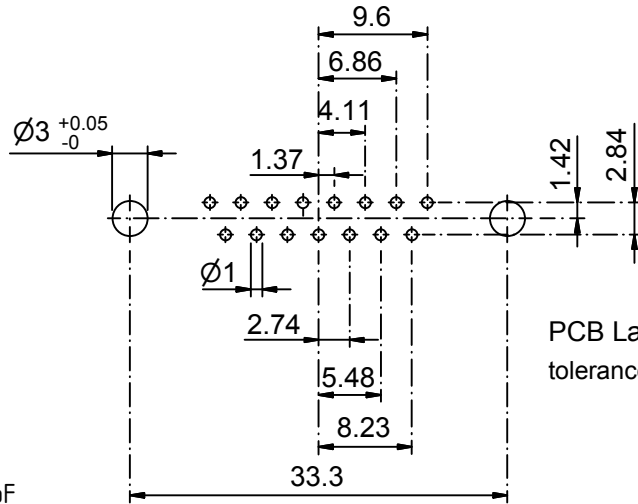

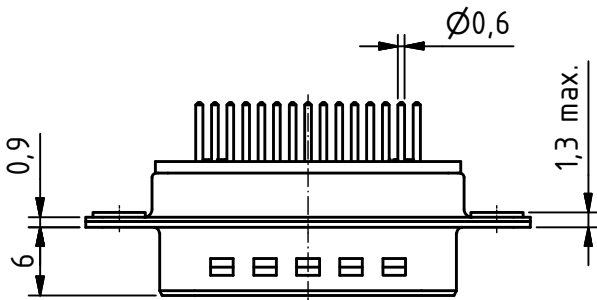



RoHS compliant

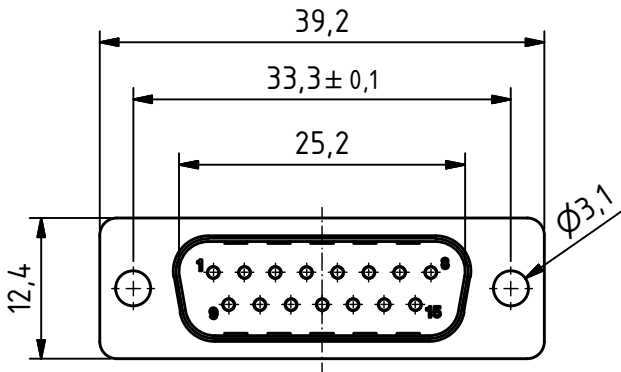

PCB Layout tolerances +/-0.1

Capacitor value 5'600 pF

General tolerances (Deltron standard)	
size in mm	tolerances
> 0.5	±0.1
up to 3	±0.2
> 3	±0.2
up to 6	±0.2
> 6	±0.2
up to 30	±0.2
> 30	±0.3
up to 120	±0.3

**MATERIALS**

- Insulator: Thermoplastic UL 94-V-0 black
- Contact: Copper alloy
- Contact finish: Quality class 2
- Shell: steel tin plated

**CHARAKTERISTICS**

- Working voltage: 100V
- Current rating: 5A
- Contact resistance: max. 10mΩ - DIN41652
- Insulation resistance: >1GΩ
- Temperature range: -55° to +125°C

modification	Rev.	Rev.	Rev.	DE005288		
	Rev.	Rev.	Rev.	part no.		
D15PY/2FP562	1.5:1 scale	drawn	06.02.2008	mr		
		checked				
		approved				
 Industrie Neuhof 8c CH-3422 Kirchberg			K060306 drawing no.			