

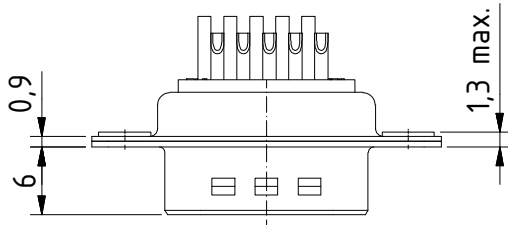



RoHS compliant

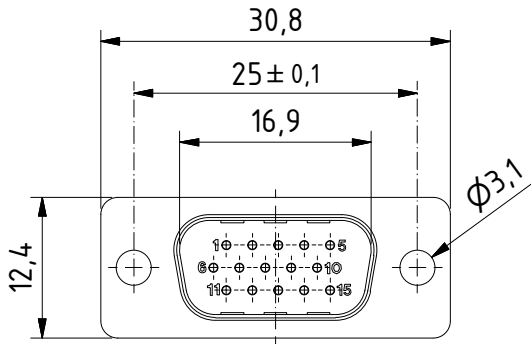

suitable for cable AWG 20


MATERIALS

- Insulator: Thermoplastic UL 94-V-0 white
- Contact: Copper alloy
- Contact finish: Quality class 2
- Shell: steel tin plated

CHARAKTERISTICS

- Working voltage: 60V
- Current rating: 3A
- Contact resistance: max. 10mΩ - DIN41652
- Insulation resistance: >5GΩ
- Temperature range: -55° to +125°C

General tolerances (Deltron standard)			
size in mm	tolerances		
	> 0,5 up to 3	> 3 up to 6	> 6 up to 30
±0,1	±0,2	±0,2	±0,3

modification	Rev.	Rev.	Rev.	DE008373 part no.		
	Rev.	Rev.	Rev.			
HD-D15PZ/2	1.5:1 scale	drawn	14.07.2009	mr		
		checked				
		approved				
 Industrie Neuhof 8c CH-3422 Kirchberg		K060050 drawing no.				