





Features


- ◆ By employing engineering plastic, this item has an excellent heat and chemical resistance.
- ◆ Standard gold-plated contact points & double movable contacts ensure reliability and longer life expectancy.
- ◆ Compatible for automatic cleaning. High pressure wiping contacts allows aqueous or solvent cleaning.
- ◆ Insert-molding technology guarantee to avoid epoxy and water from intruding.

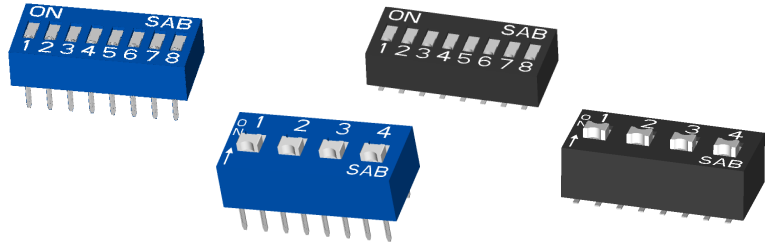


BSE

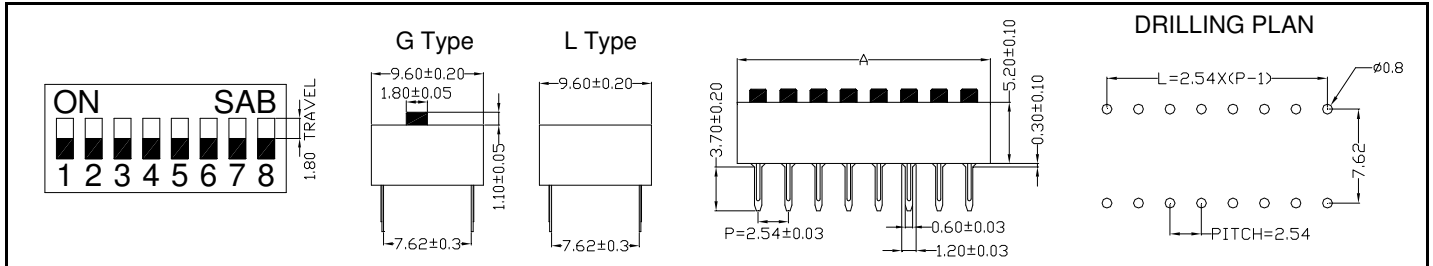

BSE2F

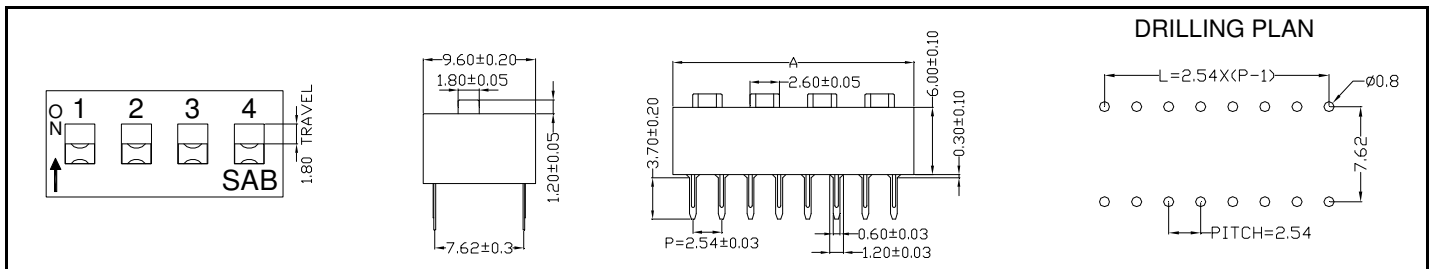

BSEM / BSEM2F

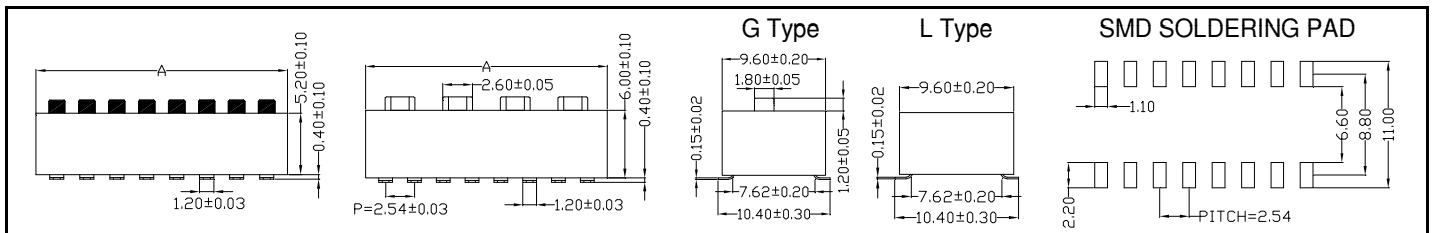

Specifications

- ◆ Contact Rating
 - Switching 25mA, 24VDC
 - Non-Switching 100mA, 50VDC
- ◆ Contact Resistance
 - Initial 50mΩ Max
 - After Life Test 100mΩ Max.
- ◆ Insulation Resistance 100MΩ min at 500VDC
- ◆ Dielectric Strength 500VDC/1 minute
- ◆ Operating Force 1,000g Max
- ◆ Mechanical Life 5,000 cycles
- ◆ Electrical Life 2,000 cycles


Soldering Information

- ◆ Hand Soldering
 - Soldering Iron 30W (or under) at 350°C/3 sec. Max. or at 270°C/5 sec. Max.
- ◆ Wave Soldering
 - Temperature: 260°C/10 sec. Max.
- ◆ Keep all actuators in "OFF" position during soldering and cleaning process.


Packaging Information

- ◆ All DIP switches are shipped in Tube.
- ◆ Actuators all in "OFF" position.

Order Information

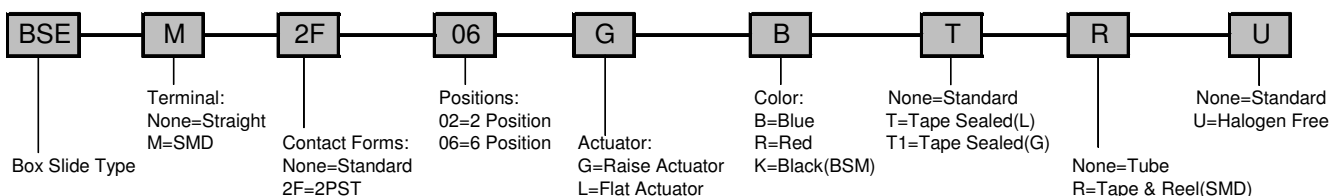

Wiring Diagram

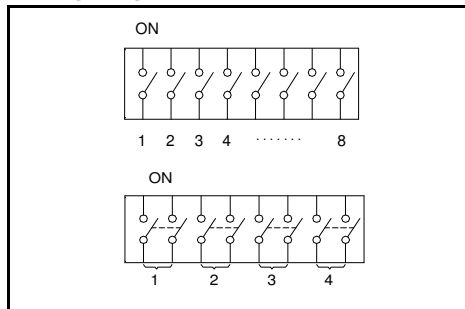

Materials

- ◆ **Cover**: High Temperature UL 94V-0 Thermoplastic; Blue, Red & Black.
- ◆ **Base**: High Temperature UL 94V-0 Thermoplastic Black.
- ◆ **Actuator**: High Temperature UL 94V-0 Thermoplastic, White.
- ◆ **Terminal & Movable Contact**: Copper Alloy with Gold Plated.
- ◆ **Terminal**: Copper Alloy with Pure-Tin Plated.
- ◆ **Tape Sealed**: Polyester Film.

P/N	No. Of Pole	Dim. A	Quantity per Tube
BSE(M)01	1	3.54mm	148
BSE(M)02	2	6.08mm	85
BSE(M)03	3	8.62mm	61
BSE(M)04	4	11.16mm	47
BSE(M)05	5	13.70mm	38
BSE(M)06	6	16.24mm	32
BSE(M)07	7	18.78mm	28
BSE(M)08	8	21.32mm	24
BSE(M)09	9	23.86mm	22
BSE(M)10	10	26.40mm	20
BSE(M)12	12	31.48mm	16
BSE(M)2F01	1	6.08mm	85
BSE(M)2F02	2	11.16mm	47
BSE(M)2F03	3	16.24mm	32
BSE(M)2F04	4	21.32mm	24
BSE(M)2F05	5	26.40mm	20
BSE(M)2F06	6	31.48mm	16