

CUSTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION
		KAN0444	TACT SWITCH	А

1、 概述

GENERAL

1.2 适用范围

APPLICATION

此规格书适用于机械式轻触开关的相关要求

This specification is applied to the requirements for TACTILE SWITCH (MECHANICAL CONTACT)

1.3 工作温度范围

Operating Temperature Range

- -20℃~70℃(在标准大气压、标准湿度条件下)
- -20°C ~70°C (Normal humidity, normal air pressure)
- 1.4 贮藏温度范围

Storage Temperature Range

- -30℃~80℃(在标准大气压、标准湿度条件下)
- -30 $^{\circ}$ C $^{\circ}$ 80 $^{\circ}$ C (Normal humidity, normal air pressure)
- 1.5 测试条件

Test Conditions

在没有其它特定的条件下,应该在以下的条件下进行测试和测量:

Unless otherwise specified, tests and measurement shall be made in the following standard conditions:

常温......5℃~35℃

Normal temperature......5°C ~35°C

标准湿度......相对湿度 25%~85%

Normal humidity.....relative humidity 25%~85%

标准大气压......86KPa~106Kpa

Normal air pressure......86Kpa~106Kpa

在制造过程中,测试和测量应该在以下的条件下进行:

If any doubt arise from the judgment, tests shall be conducted at the following conditions:

温度......20℃±2℃

Temperature.....20 $^{\circ}$ C±2 $^{\circ}$ C

相对湿度......65%±5%

Relative humidity......65%±5%

环境气压......86KPa~106Kpa

Air pressure......86KPa~106Kpa

TACTRONIC

APPROVAL SPECIFICATIONS

CUSTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION
		KAN0444	TACT SWITCH	А

2、 详细说明

Detailed specification

2.1 外观:应无影响、降低产品性能的缺陷;

Appearance: There should be no defects that affect the serviceability of product.

2.2 结构尺寸和安装尺寸:应符合装配图要求;

Style and dimension: shall conform to the assemble drawings.

2.3 操作形式:有触觉反应的操作

Type of actuating: Tactile feedback.

2.4 开关结构: 单回路单输出(具体的触点结构在装配图中已绘出);

Contact arrangement: 1 pole, 1 throw

(Details of contact arrangement are given in the assembly drawings.)

2.5 开关工作额定值: DC 12V, 50mA (有效值)

Ratings: 12V DC, 50mA (effective value)

3. 电气性能:

ELECTRICAL SPECIFICATION

项	目		Ť	试验条件			要求	
ITI	EM		TE	EST CONDITIONS		REG	QUIREMENTS	
		接触电阻	在以 5V 10mA的] 的电路中,以一个等于 Applying a static			<50.0		
1		act Resistance	the center of the stem.	, measurements sha	II be made by		$\leq 50 \mathrm{m}\Omega$	
			5V DC 10mA or mo	re than 1KHZ AC	small-current			
			contact resistance meter.					
2	I	绝缘电阻 nsulation Resistance	在端子之间施加 DC 100V /1min 的条件下,测量端子之间底座、盖板的电阻值 Measurement shall be made following application of 100V DC potential, across terminals, and across terminals and cover, for one minute.				≥100MΩ	
介质耐压 3 Dielectric voltage proof			在端子之间施加 250V AC(50HZ 或 60HZ)/1min 250V AC (50HZ or 60HZ) shall be applied across terminals, for one minute.				无击穿、无飞弧 There should be breakdown and flashover	
APPROVE	APPROVE BY 黄蜀东 09.10.		25 CHECKED BY	关 林 09.10.25	PRPARE B	Y	曹 盖 09.10.25	



9 1 1	ACIKOI	VIC	APPROVAL	SPECIFIC		IONS
С	USTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT		REVISION
			KAN0444	TACT SWITCH	ł	Α
	项目 ITEM	7	试验条件 FEST CONDITIONS		R	要求 EQUIREMENTS
4	触点抖动 Bounce	在导通和断开过程中测 Lightly striking the cer	nter of the stem at a rat mes per second), and Fr"	te encountered in bounce shall be		3msec.max -8msec.max
	械性能: IANICAL SPEC	IFICATION				
1	按力 Operating Force	开关垂直于操作方向放置,在开关驱动件顶端中心逐渐施力,测量开关导通所需的最大力度。 Placing the switch such that the direction of switch operation is vertical and then gradually increasing the load applied to the center of the stem, the maximum load required for the switch to come to a stop shall be measured.				2.2±0.5N
2	最大行程 Full Travel	开关垂直于操作方向放 开关驱动件顶端中心, Placing the switch suc vertical and then apply the center of the stem;	witch operation is operating force to		0.20±0.1mm	

关 林 09.10.25

PRPARE BY

曹 盖 09.10.25

to a stop shall be measured.

CHECKED BY

黄蜀东 09.10.25

APPROVE BY



С	USTOMER	CUSTOMER'S P.		S P/N		RODUCT		REVISION
			KAN	10444	TAC	CT SWITCH		А
	项目 ITEM		试 验 条 TEST COND				RE	要求 QUIREMENTS
3	回弹力 Return Force	开关垂直于操作方 后,测量顶端向自 The sample switch operation is vertica to the whole travel free position shall	由位置转换的力 n is installed suc al and upon dep distance, the fo	of switch its center		0.5N.min		
4	停止强度 Stop Strength	开关垂直于操作方 荷持续 1min。 Placing the switch vertical, and then direction of stem o	eration is	There s	L械和电气损坏 shall be no sign of e mechanically and electrically.			
5	手柄拔出 强度 Stem Strength	的行程范围。 Placing the switch vertical, and then t	开关垂直于操作方向放置,反方向实施最大操作力,并测量手柄的行程范围。 Placing the switch such that the direction of switch operation is vertical, and then the maximum force to withstand a pull applied opposite to the direction of stem operation shall be measured.					20N.min.
6	可焊性 Solderability	在以下设定条件下进行测量: Measurements shall be made following the test set forth below: (1) 焊接温度:245±5℃ Solder temperature: 245±5℃ (2) 浸入时间:2s±0.5s Immersion time: 2s±0.5s 对于其它步骤参考《GB 5095.6—86》试验 12a The other steps please refer to《GB 5095.6-86》TEST 12a						外涂层应均匀覆盖 c for the edge, the should cover a n 90%
APP	ROVE BY	責蜀东 09.10.25 (CHECKED BY	关 林 09.	10.25	PRPARE	BY .	曹 盖 09.10.25

TACTRONIC

					<u> </u>	APPROVAL SPECIFICATIONS							
CUS	STOMER		CUSTOMER	'S P/N	GYE'	S P/N	Р	RODUCT		REVISION			
					KAN	0444	TAC	CT SWITCH		А			
	项目				试 验	条件			要求				
	ITEM TEST CONDITIONS					RE	QUIREMENTS						
	5、极限电气性能: ENVIRONMENTAL SPECIFICATION												
1 R	氏温测试 esistance ow tempera	to iture	标准湿度的 Following t normal ten measureme (1) 温质 Tem (2) 时间	样品应按照以下实验条件进行测试,实验后样品应放在常温及标准湿度的环境中 1 小时后做性能测试: Following the test set forth below the sample shall be left in normal temperature and humidity conditions for 1 h before measurements are made: (1) 温度: -30±2℃ Temperature: -30±2℃ (2) 时间: 96h Time: 96h						阻: ≤200mΩ t resistance: Ω 4.1,4.2,4.3 4.1,4.2,4.3			
	5温测试 eat resista	nce	标准湿度的 Following t normal ten measureme (1) 温质 ten (2) 时间	temperature:80±2℃ (2) 时间: 96h						阻: ≤200mΩ t resistance: Ω 4.1,4.2,4.3 4.1,4.2,4.3			
3	温度周期性 Change temperatu	of	样品应放在 试期间样品 After 5 cyc allowed to conditions	time: 96h 提展下面的测试要求进行 5 次循环的温度周期性测试,实验后品应放在常温及标准湿度的环境中 1 小时后做性能测试。测试期间样品应保持干燥. fter 5 cycles of following conditions, the sample shall be lowed to stand under normal temperature and humidity anditions for 1 h. and measurements shall be made. During the test water drops shall be removed. Temperature Time 1 cycle 1 cycle 1 conditions 1 con						阻: ≤200mΩ t resistance: Ω 4.1,4.2,4.3 4.1,4.2,4.3			
APPROVE BY 黄蜀东 09.10.25 CHECKED BY 关 林 09.10.25 PRPARE BY 曹				曹 盖 09.10.25									



ATTROVALSILOII						<u> </u>	10110		
С	USTOMER	CUSTOMER'S P/N	N GYE'S	P/N	PRODUCT		REVISION		
			KAN04	144	TACT SWITC	Н	Α		
	项目		试 验 条	件		1	要求		
	ITEM		TEST COND	ITIONS		F	REQUIREMENTS		
4	湿温测试 Moisture resistance	标准湿度的环境中 Following the te normal temperar measurements a (1) 温度: 60 temperatu (2) 相对湿度	$0\pm2^{\circ}$ tre: $60\pm2^{\circ}$ $\pm~90\%^{\sim}95\%$ umidity: 90% to 95%	接触· Conta ≤200 项目					
5	硫化试验 Sulfuration resistance	标准湿度的环境中 Following the tenormal tempera measurements a (1) H2S 气体 H ₂ S gas c (2) 时间: 72 Time: 72h (3) 温度: 40:	x浓度:3ppm±1p concentration: 3 th	i 接触 Conta ≤200 项目					
6	盐雾试验 Salt Mist	(1)温度:35℃ temperatu (2)盐溶液浓度 salt solutio (3)时间:8h± Time:8h±1 实验后的盐沉积物	II be checked afte E±2℃ re: 35℃±2℃ f: 5±1%(质量百 on : 5±1%(solids I 1h hour	No r shall	金属件上没有腐蚀斑点 No remarkable corrosion shall be recognized in metal part.				
APPROVE BY 黄蜀东 09.10.25 CHECKED BY 关 林 09.10.25 PRPARE BY 曹 盖 09.10						曹 盖 09.10.25			

OTACTRONIC

JIACI RONIC				APPROVAL SPECIFICATIONS					
С	USTOMER	(CUSTOMER'S P/N	GYE'	S P/N	Р	RODUCT		REVISION
				KAN	0444	TAC	CT SWITCH		А
	限机械性能: NDURANCE	SPEC	IFICATION					l	
	项目			试 验	条件				要求
	ITEM			TEST CON	IDITIONS			RE	QUIREMENTS
1	工作寿命 Operation		Measurement shal (1) DC 12V, 50 DC 12V, 50 (1) 按动速率: Rate of ope (3) 按力: 按力 (4) Operating I (5) 平均无故障	的测试要求进行测试: ment shall be made following the test set forth below: C 12V, 50mA 带负载 C 12V, 50 mA resistive load 按动速率: 2 次/秒 Rate of operation: 2 times/s 按力: 按力的 1.5 倍 Operating Force: Operating Force1.5 倍 P均无故障寿命: 50,000 次 Verage fault-free life:50,000 cycles 接触电阻≤200mΩCo resistance≤200mΩ 按 力: 初值的± Operating Force: initial value±30% 项目 3,4.1,4.2,4.3 Item 3,4.1,4.2,4.3					nce≤200mΩ 初值的±30% ng Force: alue±30% 4.1,4.2,4.3
2	振动 Vibra	tion	Measurement shal (1) 振动频率剂 Vibration (2) 振幅(峰- Amplitude (3) 振动方向: Direction direction in (4) 测试时间:	Vibration frequency range: 10 to 55 to 10Hz (2) 振幅(峰一峰): 1.5mm Amplitude: 1.5mm (3) 振动方向: 包括手柄行程方向在内的三个相互垂直的方向 Direction of vibration:Three mutually perpendicular direction including the direction of stem travel					4.1,4.2,4.3 4.1,4.2,4.3
7. 焊									
SOLD	ERING CON	DITIO	NS:						
				条件进行焊接 盘度: ≤350℃					
7.1	手工焊接		(1) 岸物温度: ≪330 C (2) 连续焊接时间: ≪3 s						
1.1	Hand solde	ering	,			conditio	ons:		
			Please practice according to below conditions: (1) Soldering temperature: 350°C Max. (2) Continuous soldering time: 3 s Max.						
APP	ROVE BY	黄蜀		CKED BY	关 林 09.		PRPARE	BY	曹 盖 09.10.25



С	USTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION			
			KAN0444	TACT SWITCH	A			
	项目		推荐条件					
	ITEM	ded conditions						
7.2	回流焊时 Conditions for reflow	温度 (*C) 180 - 150 -	120sec max.(预 3 to 4 m 炉内通过	热) 40s m	—— 时间			

说明: 1.1 开关浸焊后,注意不要用溶剂清洗。

After switches were soldered, please be careful not to clean switches with solvent.

- 1.2 在使用烙铁的情况下,焊锡温度应在 380℃以下、3 秒以内。 In the case of using solding iron, solding conditions shall be 380℃ max and 3 sec.max.
- 1.3 浸焊后,注意不要在顶部施加负荷。
 Right after switches were soidered; please be careful not to load to on the knobs of switches.

2 设计中应注意的事项(Design instructions):

2.1 印刷基板的安装孔尺寸参见产品图。
Follow recommended P.W.B. piercing plan in outside drawing page.


3 注意点(Note):

- 3.1 注意不要施加超负荷的压力或晃动开关 Please be cautions not to give excessive static load or shock to swiches.
- 3.2 开关浸焊后,印刷基板注意不要叠放。 Please be careful not to pile up P.W.B.after switches were soldered
- 3.3 保管时尤其应注意避开高湿高温和有腐蚀性气体的环境。如需要长时间保存,请不要打开包装箱。 Preservation under high temperature and high high humidity or corrosive gas should be avoided Especially . When you need to preserve for a long period ,do not open the carton .

APPROVE BY	黄蜀东 09.10.25	CHECKED BY	关 林 09.10.25	PRPARE BY	曹 盖 09.10.25



CUSTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION
		KAN0444	TACT SWITCH	А

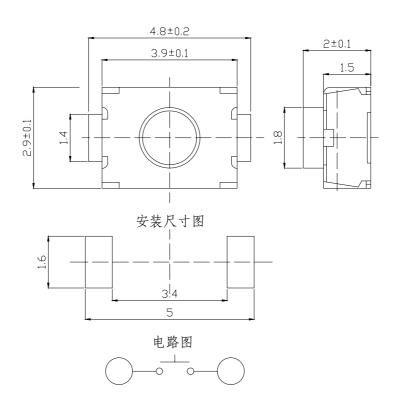

General tolerance: ±0.1mm

NO.	NAME	MATERIAL	NATIONALITY	QTY.	FINISHING
1	TERMINAL	Brass	China	1	Silver plating
2	CASE	FR52	USA	1	
3	CONTACT	STS 301	korea	1	Contact side silver plating
4	COVER	STS301	China	1	
5	STEM	FR52	USA	1	

APPROVE BY	黄蜀东 09.10.25	CHECKED BY	关 林 09.10.25	PRPARE BY	曹 盖 09.10.25