



Cartridge Fuse Blocks


Fuse Block > 656 Series

656 Series Molded Base PC Mount Fuse Block For 5×20mm Fuses

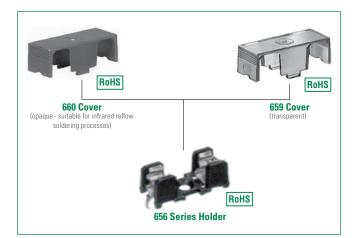


Dimensions





Max. dimension for removal of cover Dimensions in Millimeters

Re-rating Curves



Product Characteristics			
Compatible Fuse Size	5×20mm		
Materials	Holder: Black Thermoplastic UL94 V-0		
	Metal Parts: Tin plated copper alloy		
Electrical Data	Rated Voltage: 250VAC		
	Rated Current: 10A		
	Rated Power Acceptance (at ambient air temp 23oC): - 4W without cover - 4W with 660 cover - 2.5W with 659 cover		
Mounting	656: Solder pins 0.4mm×1.1mm Ø 2.7mm screw hole may be used optionally		
Operating Temperature	-40°C to +85°C		
Climatic Category	40/085/21 according to IEC 60068-1		
Stock Conditions	0 °C to 60 °C, at max. 70% relative humidity		
Vibration Resistance	According to IEC 60068-2-6, Test Fc		
Contact Resistance	<5mΩ		
Dielectric Strength	> 3kV, 50 Hz, 1 min.		
Impulse withstand Voltage	> 4kV between life parts		
Insulation Resistance	(500 V DC/1 min): >10 M Ω between live parts of different potentials		
Solderability	245°C/3 sec. according to IEC 60068-2-20, Test Ta, method 1		
Soldering Heat Resistance	260°C/10 sec. according to IEC 60068-2-20, test Tb method 1		
Minimum Cross Section	Conducting path - 0.2mm ²		
Torque/fixing screw	Max. 0.3 Nm		

Note: If used with covers, refer to Fuseology for information on proper fuse block re-rating.

Agency Approval		
Agency	Agency File Number	
DE	40001499	
c RL ° us	E70164	

Additional Information





RoHS 🔊 🖄 c 📲 us

Ordering Information

Part Number	Description	Packaging
65600001009	Fuse Block - "A" dimension 22.5mm	Bulk Pack (100 Pcs)
65600001409	Fuse Block - "A" dimension 25mm	Bulk Pack (100 Pcs)
6590000009	Fuse Holder Cover - Transparent plastic	Bulk Pack (100 Pcs)
6600001009	Fuse Holder Cover - Opaque plastic, suitable for infrared (IR) reflow soldering process	Bulk Pack (100 Pcs)

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at: www.littelfuse.com/disclaimer-electronics.