


D FLF-501B

MULTILAYER FERRITE CHIP FERRITE INDUCTORS

Shape And Dimensions


SHAPE & DIMENSION(unit/mm):

The shell size

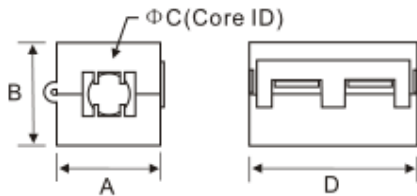

Item	No Tube
A (mm)	15.0± 1
B (mm)	14± 1
C (mm)	6.0± 1
D(mm)	23± 1
E(mm)	10± 0.5
F(mm)	20± 0.6
G(mm)	5.0± 0.4
H(mm)	5.2± 0.4

Magnetic core size

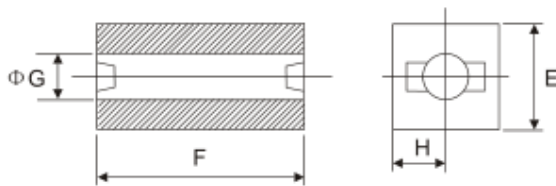

ELECTRICAL REQUIREMENTS:

□ L		TEST FREQ	KHZ MHZ	
□ Q		TEST FREQ	KHZ MHZ	
▣ Z	Z1= 60Ω MIN	KHZ 25 MHZ	Z2=130Ω MIN	KHZ 100 MHZ
	Z3= /	KHZ MHZ	Z4= /	KHZ MHZ
温度 TEMP	℃	湿度 HUMIDITY	%	
線組 WINDING	Φ0.5x0.5TSx100L(mm)			

TEST INSTRUMENTS

- Q-METER:
○ HP 4342A ○ MQ-172
- L.C.R. METER:
○ HP 4284A
- IMPEDANCE ANALYZER:
○ HP 4396B ○ HP 4191A ∅ E4991A
∅ Agilent 16194A-TESTFIXTURE
- L-METER:
○ TH 2817A
- DIGITAL MINI-OHMMETER:
○ VP2941A

MATERIAL CHARACTERISTICS

