Silicon PIN Photodiode with very short switching time Version 1.3

SFH 229 FA



Features:

- · Especially suitable for applications of 880 nm
- Short switching time (typ. 10 ns)
- 3 mm LED plastic package
- · Also available on tape and reel

Applications

- Photointerrupters
- · Industrial electronics
- · For control and drive circuits

Ordering Information

Туре:	Photocurrent	Ordering Code
	Ι _Ρ [μΑ]	
	$V_R = 5 \text{ V}, \lambda = 950 \text{ nm}, E_e = 1 \text{ mW/cm}^2$	
SFH 229 FA	20 (≥ 10.8)	Q62702P0216



$\underline{\text{Maximum Ratings } (T_A = 25 \, ^{\circ}\text{C})}$

Parameter	Symbol	Values	Unit
Operating and storage temperature range	T _{op} ; T _{stg}	-40 100	°C
Reverse voltage	V _R	20	V
Total Power dissipation	P _{tot}	150	mW
ESD withstand voltage (acc. to ANSI/ ESDA/ JEDEC JS-001 - HBM)	V _{ESD}	2000	V


Characteristics (T_A = 25 °C)

Parameter		Symbol	Values	Unit
Photocurrent $(V_R = 5 \text{ V}, \lambda = 950 \text{ nm}, E_e = 1 \text{ mW/cm}^2)$	(typ (min))	I _P	20 (≥ 10.8)	μΑ
Wavelength of max. sensitivity	(typ)	$\lambda_{\text{S max}}$	900	nm
Spectral range of sensitivity	(typ)	λ _{10%}	(typ) 730 1100	nm
Radiant sensitive area	(typ)	Α	0.31	mm ²
Dimensions of radiant sensitive area	(typ)	LxW	0.56 x 0.56	mm x mm
Half angle	(typ)	φ	± 17	0
Dark current (V _R = 10 V)	(typ (max))	I _R	0.05 (≤ 5)	nA
Spectral sensitivity of the chip $(\lambda = 850 \text{ nm})$	(typ)	S _{\(\lambda\) typ}	0.6	A/W
Quantum yield of the chip (λ = 850 nm)	(typ)	η	0.88	Electro ns /Photon
Open-circuit voltage $(E_e = 0.5 \text{ mW/cm}^2, \lambda = 870 \text{ nm})$	(typ (min))	Vo	420 (≥ 370)	mV
Short-circuit current (E _e = 0.5 mW/cm ² , λ = 950 nm)	(typ)	I _{SC}	9	μΑ
Rise and fall time $(V_R = 10 \text{ V}, R_L = 50 \Omega, \lambda = 850 \text{ nm})$	(typ)	t _r , t _f	0.01	μs
Forward voltage $(I_F = 100 \text{ mA}, E = 0)$	(typ)	V _F	1.3	V
Capacitance $(V_R = 0 \text{ V}, f = 1 \text{ MHz}, E = 0)$	(typ)	C ₀	13	pF
Temperature coefficient of V _O	(typ)	TC _V	-2.6	mV / K




Parameter		Symbol	Values	Unit
Temperature coefficient of I_{SC} ($\lambda = 870 \text{ nm}$)	(typ)	TCı	0.2	% / K
Noise equivalent power $(V_R = 10 \text{ V}, \lambda = 850 \text{ nm})$	(typ)	NEP	0.007	pW / Hz ^½
Detection limit $(V_R = 10 \text{ V}, \lambda = 850 \text{ nm})$	(typ)	D*	8.4e12	cm x Hz ^{1/2} / W

Relative Spectral Sensitivity 1) page 8 $S_{rel} = f(\lambda)$

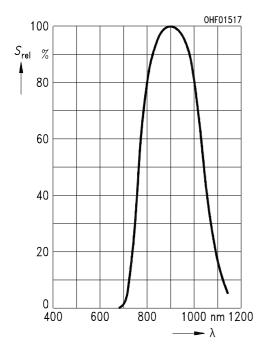


Photocurrent / Open-Circuit Voltage $^{1) page 8}$ $I_P (V_R = 5 \text{ V}) / V_O = f(E_e)$

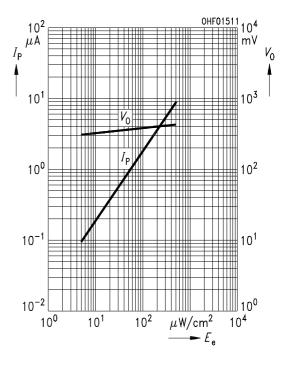


Power Consumption

$$P_{tot} = f(T_A)$$

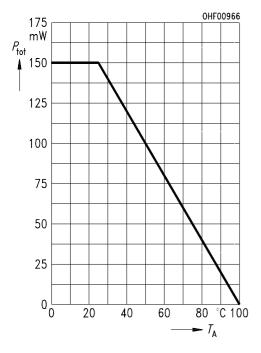


Capacitance 1) page 8

$$C = f(V_R)$$
, $f = 1 MHz$, $E = 0$

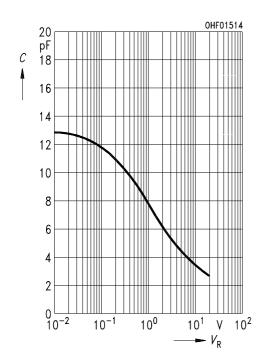


Dark Current 1) page 8

$$I_R = f(V_R), E = 0$$

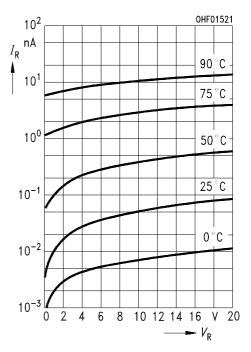


Dark Current 1) page 8

$$I_R = f(T_A), V_R = 10 \text{ V}, E = 0$$

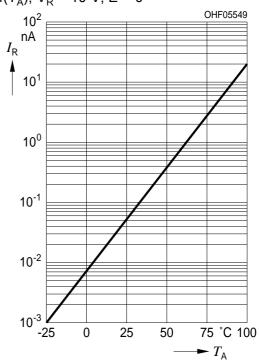


Directional Characteristics 1) page 8

$$S_{rel} = f(\phi)$$

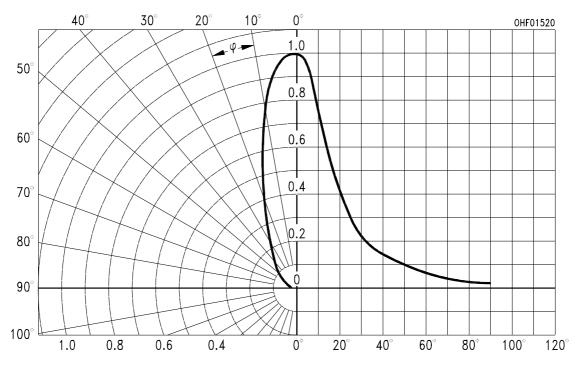

Package Outline

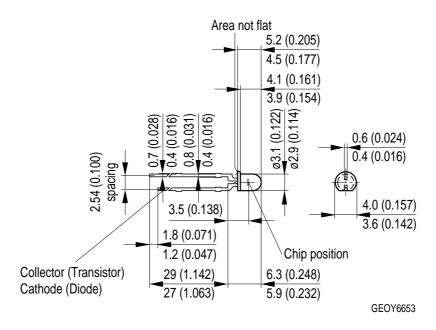

Dimensions in mm (inch).

Package

3mm Radial (T 1), Epoxy




Approximate Weight:

0.2 g

Note

Packing information is available on the internet (online product catalog).

Recommended Solder Pad

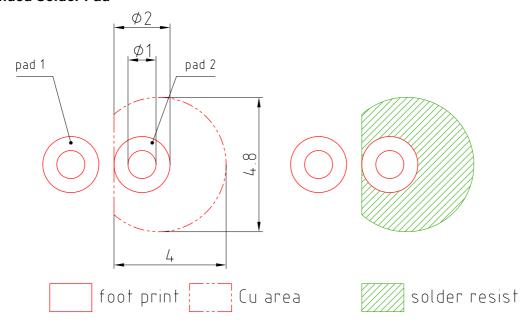

E062.3010.188-01

Dimensions in mm.


Note:

pad 1: anode



TTW Soldering

IEC-61760-1 TTW

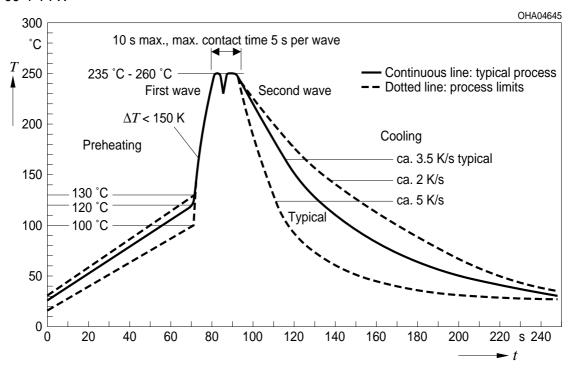

Disclaimer

Language english will prevail in case of any discrepancies or deviations between the two language wordings.

Attention please!

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved. Due to technical requirements components may contain dangerous substances.

For information on the types in question please contact our Sales Organization.

If printed or downloaded, please find the latest version in the Internet.

Packing

Please use the recycling operators known to you. We can also help you – get in touch with your nearest sales office. By agreement we will take packing material back, if it is sorted. You must bear the costs of transport. For packing material that is returned to us unsorted or which we are not obliged to accept, we shall have to invoice you for any costs incurred.

Components used in life-support devices or systems must be expressly authorized for such purpose!

Critical components* may only be used in life-support devices** or systems with the express written approval of OSBAM OS

- *) A critical component is a component used in a life-support device or system whose failure can reasonably be expected to cause the failure of that life-support device or system, or to affect its safety or the effectiveness of that device or system.
- **) Life support devices or systems are intended (a) to be implanted in the human body, or (b) to support and/or maintain and sustain human life. If they fail, it is reasonable to assume that the health and the life of the user may be endangered.



Glossary

Typical Values: Due to the special conditions of the manufacturing processes of LED, the typical data or calculated correlations of technical parameters can only reflect statistical figures. These do not necessarily correspond to the actual parameters of each single product, which could differ from the typical data and calculated correlations or the typical characteristic line. If requested, e.g. because of technical improvements, these typ. data will be changed without any further notice.



Published by OSRAM Opto Semiconductors GmbH Leibnizstraße 4, D-93055 Regensburg www.osram-os.com © All Rights Reserved.

EU RoHS and China RoHS compliant product 此产品符合欧盟 RoHS 指令的要求; 按照中国的相关法规和标准,不含有毒有害物质或元素。

