### Membrane Switch Frontpanel Short Stroke 18 mm







### **Approvals and Compliances**

### **Description**

- Momentary action switch available in version square or round in different colours
- High lifetime with 5 million actuations
- Front and rear tested to degree of protection IP 65
- Snap-in type from front side
- Solder terminals

# **Unique Selling Proposition**

- Unique mechanical switches with tactile feedback
- Small mounting depth
- Various lettering options

#### **Characteristics**

- IEC/UL 60950

#### Weblinks

html-datasheet, General Product Information, CAD-Drawings, Product News, Detailed request for product

### **Technical Data**

Electrical Data		
Impulse Withstand Voltage (ESD)	± 16 kV	
Contact Material Silver		
Switching Voltage	min. 5 VDC, max. 48 VDC	
Switching Current	max. 125 mA	
Rated Switching Capacity	0.72 W	
Lifetime	> 1 million actuations at Rated Swit- ching Capacity	
Contact Resistance	< 50 mΩ	
	< 150 mΩ after lifetime	
Insulation Resistance	> 100 MΩ	
Duration of Bounce	typ. 0.1 ms	
Contact Material Gold		
Switching Voltage	min. 50 mVDC, max. 24 VDC	
Switching Current	max. 80 mA	
Rated Switching Capacity	0.36 W	
Lifetime	> 1 million actuations at Rated Swit- ching Capacity	
Contact Resistance	< 50 mΩ	
	< 150 mΩ after lifetime	
Insulation Resistance	> 100 MΩ	
Duration of Bounce	typ. 0.1 ms	

Mechanical Data			
Actuating Force	3 ± 1 N		
Actuating Travel	0.5 ± 0.1 mm		
End Stop Strength	> 50 N		
Lifetime	> 1 million actuations		
Tightening Torque	8N/cm		
Climatical Data			
Operating Temperature	-25°C to 60°C		
Storage Temperature	-25 °C to 60 °C		
IP-Protection	IP 65 (only with accessory kit)		
Other Data			
Contact Material	Ag / Au		
Soldering Data			
Solderability	235 °C / 2 sec (IEC 60068-2-20 Test Ta Method 1)		
Resistance to Soldering Heat	260°C / 5 sec (IEC 60068-2-20 Test Tb Method 1A)		
Material	•		
Housings	Thermoplastic (PES)		
Socket	Thermoplastic (PES)		
Bezel	Thermoplastic (PBT)		
Contact	CuZn37 3 µm Ni 2 µm Au		
	CuZn37 2.5 µm Ag		
Soldering Aid	tinned		

### **Approvals and Compliances**

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals

### **Application standards**

Application standards where the product can be used

Organization Design Standard Description


Designed for applications acc. IEC/UL 60950 IEC 60950-1 includes the basic requirements for the safety of information technologyequipment.

## Compliances


The product complies with following Guide Lines

Identification	Details	Initiator	Description
RoHS	RoHS	SCHURTER AG	EU Directive RoHS 2011/65/EU
<b>©</b>	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
REACH	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.


# Dimension [mm]

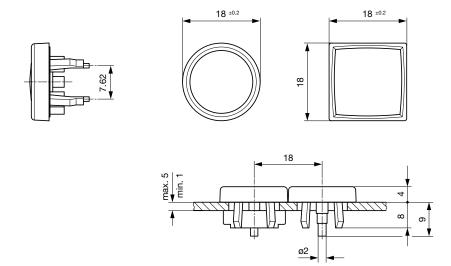


## **Dimension**

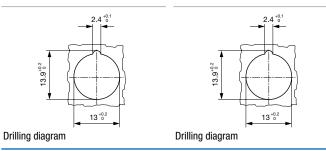

# **Assembly Instructions**

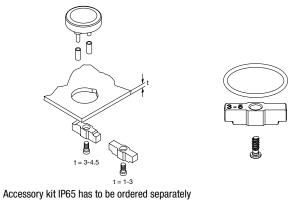

## **Diagrams**



## **Order Index Lettering**

Order index Lettering	9				
Laser Marking					
001 = <b>A</b>	021 = <b>U</b>	041 = ÷	061 = <b>EIN</b>		
002 = <b>B</b>	022 = <b>V</b>	042 = ₩	062 = <b>AUS</b>		
003 = <b>C</b>	023 = <b>W</b>	043 = <b>=</b>	063 = <b>AUF</b>		
004 = <b>D</b>	024 = <b>X</b>	044 = #	$064 = \mathbf{AB}$		
005 = <b>E</b>	025 = <b>Y</b>	045 = ↔	065 = <b>ON</b>		
006 = <b>F</b>	026 = <b>Z</b>	046 = ‡	066 = <b>OFF</b>		
007 = <b>G</b>	027 = <b>0</b>	047 = →	067 = <b>UP</b>		
008 = <b>H</b>	028 = <b>1</b>	048 = ←	068 = <b>DOWN</b>		
009 = <b>I</b>	029 = <b>2</b>	049 = ↓	069 = <b>HIGH</b>		
010 = <b>J</b>	030 = <b>3</b>	050 = ↑	070 = <b>LOW</b>		
011 = <b>K</b>	031 = <b>4</b>	051 = %	071 = <b>ON/OFF</b>		
012 = <b>L</b>	032 = <b>5</b>	052 = √	072 = <b>START</b>		
013 = <b>M</b>	033 = <b>6</b>	053 = <b>CTRL</b>	073 = <b>RESET</b>		
014 = <b>N</b>	034 = <b>7</b>	054 = <b>RETURN</b>	074 = 🕛		
015 = <b>O</b>	035 = <b>8</b>	055 = <b>SHIFT</b>	075 = 🌣		
016 = <b>P</b>	036 = <b>9</b>	056 = LOCK	076 = △		
017 = <b>Q</b>	037 = <b>+</b>	057 = <b>STOP</b>	077 = ①		
018 = <b>R</b>	038 = -	058 = <b>ENTER</b>			
019 = <b>S</b>	039 = .	059 = <b>BACK</b>			
020 = <b>T</b>	040 = x	060 = <b>LINE</b>			

# Letter heights and Fonts

- Single characters, Univers 65
- Legends max. 6 characters in line, Univers 65
- Insert label and front foil anthracite, RAO 7016
- Characters and symbols light grey, RAL 7035



### **All Variants**

Kontakte	Form	Color Bezel	Color Touchpad	Lettering	Bestellnummer	
Ag	square	black	red	without Lettering	1241.1100.7093	
Ag	square	black	green	without Lettering	1241.1100.7095	
Ag	square	black	black	without Lettering	1241.1100.7097	
Ag	round	black	yellow	without Lettering	1241.1104.7091	
Ag	round	black	red	without Lettering	1241.1104.7093	
Ag	round	black	green	without Lettering	1241.1104.7095	

Kontakte	Form	Color Bezel	Color Touchpad	Lettering	Bestellnummer
Ag	round	black	grey	without Lettering	1241.1104.7096
Ag	round	black	black	without Lettering	1241.1104.7097
Ag	round with soldering aid	black	black	without Lettering	1241.1113.7097
Accessory kit IP65	-	-	-	-	0098.9201

For Lettering versions see tables "Lettering" and "Order Index Lettering" to determine the symbol

Most Popular.

 $Availability for all products can be searched real-time: \\https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER$ 

Packaging unit

100 pcs