


RFM210LH ASK/OOK Wireless Receiver Module

1. Brief introduction

RFM210LH is a ASK/OOK wireless data Receiver , ultra low power consumption, high sensitivity, long distance communication, cost-effective RF receiver module, suitable for ISM band wireless applications.

It has the characteristics of good anti-interference and high reliability, and it can not affect the working distance even in the situation of complex interference environment.

The Module is provided by frequency 315MHz and 433.92MHz, both support 1~5kbps data rate.



2. Features

- Comply with FCC and ETSI
- Strong anti-interference ability, suitable for complex interference environment
- Receiving Sensibility: -109dBm
- Working Frequency: 315MHz,433.92MHz
- Supply Voltage Range: 3.0V-5.5V
- Working Current: 4.5mASleeping Current: ≤1uA



■ Data Rate: 1-5 kbps

■ Receiver bandwidth:330kHz


3. Application

Remote Entrance Guard

- Battery Car Security System
- Remote Socket
- Remote Doorbell
- Wireless Data Transmission
- Wireless Lighting Control
- Remote Control Toys
- Remote Control Home Appliances
- Wireless Alarming & Security System

4.Pins out

RFM210LH



Pin	Name	Function	
1	ANT	Antenna Input	
2	GND	Ground	
3	NC	NC	
4	NC	NC	
5	NC	NC	
6	VCC	Positive power	
7	DATA	Data Output	
8	GND	Ground	



5. Electrical Specifications


Testing Conditions: DC 5V / 25°C

resuring containions.	DC 31	<u> </u>				
Parameter	Label	Status	MIN.	Typical	MAX.	Unit
				Value		
Frequency Range	Fc	Model: RFM210LH-315D		315		MHz
		Model: RFM210LH-433D		433.92		MHz
Modulation				ASK/OOK		
Sensibility		1 Kbps		-109		dBm
Data Rate	DR		1		5	Kbps
Receiver Bandwidth				330		KHz
Supply Voltage			3.0		5.5	V
Working Current	Idd	433.92MHZ		4.5		mA
Sleeping Current					1	uA
Image Rejection	IMR			30		dB
Working Temperature			-40		+85	$^{\circ}$ C


6. Dimensions Diagram

RFM210LH



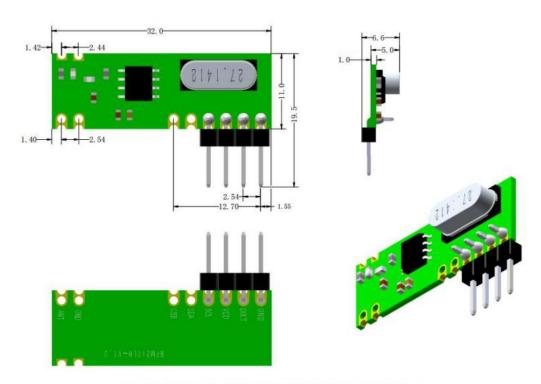

RFM210LH-315D/RFM210LH-433D

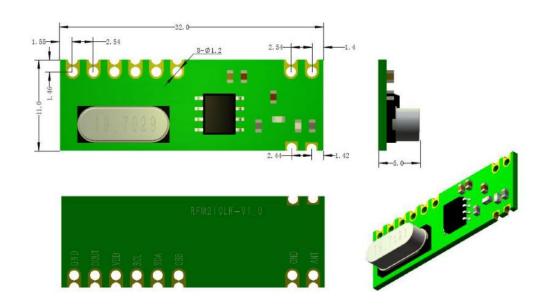

RFM210LH-315S1/RFM210LH-433S1 备注: 单位(mm)公差(±0.2mm)



7. Order infomation

Module	Frequency	Voltage	
RFM210LH-315S1	315MHz	3.0-5.5V	
RFM210LH-433S1	433.92MHz	3.0-5.5V	
RFM210LH-315D	315MHz	3.0-5.5V	
RFM210LH-433D	433.92MHz	3.0-5.5V	

HOPE MICROELECTRONICS CO.,LTD

Add:2/F,Building3,pingshan Private Enterprise science and Technology Park,xili Town,Nanshan District,

Tel: 86-755-82973805

Fax: 86-755-82973550

Email: sales@hoperf.com

Website: http://www.hoperf.com
http://www.hoperf.cn

This document may contain preliminary information and is subject to change by Hope Microelectronics without notice. Hope Microelectronics assumes no responsibility or liability for any use of the information contained herein. Nothing in this document shall operate as an express or implied license or indemnity under the intellectual property rights of Hope Microelectronics or third parties. The products described in this document are not intended for use in implantation or other direct life support applications where malfunction may result in the direct physical harm or injury to persons. NO WARRANTIES OF ANY KIND, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MECHANTABILITY OR FITNESS FOR A ARTICULAR PURPOSE, ARE OFFERED IN THIS DOCUMENT.

©2006, HOPE MICROELECTRONICS CO.,LTD. All rights reserved.